

NAN YA PLASTICS CORPORATION

SPECIFICATION OF
LCD MODULE
PRODUCT NO.: LTA75Q227L20S

SPEC. NO.: LM227-20A-

CUSTOMER
APPROVED BY
DATE :

LCD DEPARTMENT
ELECTRONIC MATERIALS DIVISION
NAN YA PLASTICS CORPORATION
201, TUNG HWA N. ROAD, TAIPEI
TEL: 886-2-27122211 EXT. 5993~5995
FAX: 886-2-27178253
E-mail: lcdsales@npc.com.tw


EDITED ON. : JAN.02. 2006

Q.C. DEPT.	DESIGN MANAGER	DESIGN CHECK	DESIGNER
			J.P Weng

1. MECHANICAL DATA

NO	ITEM	CONTENTS	UNIT
1	Product No.	LTD75Q227L20S	-
2	Module Size	74.6 Max(W) x 56.1Max (H) x 3.8 Max (D)	mm
3	Dot Size	0.23 (W) x 0.23 (H)	mm
4	Dot Pitch	0.24 (W) x 0.24 (H)	mm
5	Number of Dots	240 (W) x 160 (H)	Dot
6	Duty	1/160	-
7	LCD Display Mode	FSTN, Normally White / Positive Image	-
8	Rear Polarizer	Reflective	-
9	Viewing Direction	6	O'clock
10	Backlight	None	-
11	Controller	Excluded	-
12	Weight	15 (Approx.)	g
13	Soldering	Lead Free	-

Note :

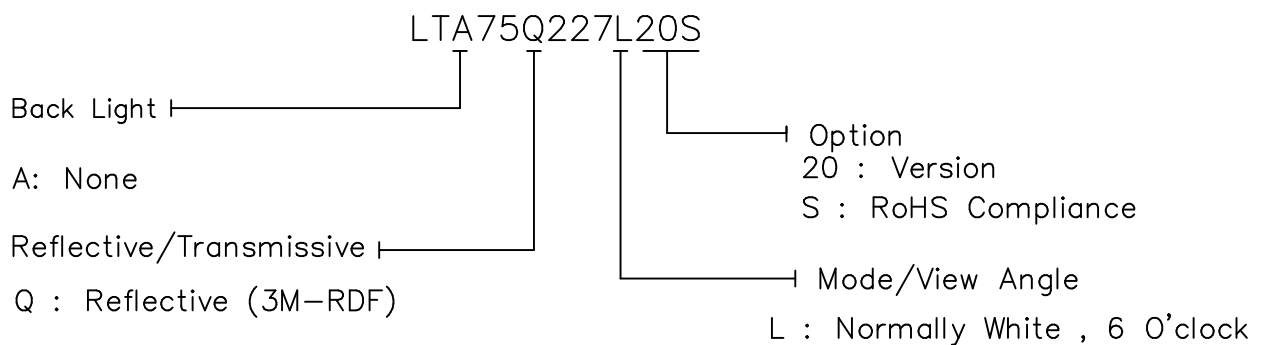

RoHS Compliance.

Nan Ya guarantees that this project doesn't include any materials (6 materials) or includes less than specified quantities which are regulated by RoHS Compliance.

2. ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

VSS=0 V Standard

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	6.5	V	
Input Voltage	VEE-VSS	0	27	V	
Static Electricity	-	-	-	-	Note 1

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	NORMAL TEMP.			
	OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	0	50	-20	70
Humidity (Without Condensation)	Note 2,4		Note 3,4	

Note 2 $T_a \leq 50^\circ\text{C}$: 80%RH max

Note 3 Please refer to item of reliability test

Note 4 Background color will change slightly depending on ambient temperature.
That phenomenon is reversible.

3. ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Supply voltage for logic	VDD-VSS	-		3	3.3	3.6	V
Input Voltage	VIH	H level		0.8VDD	-	VDD	V
	VIO	L level		0	-	0.2VDD	
Recommended LC Driving Voltage	VEE-VSS (Vop)	1/240 Duty 1/13 Bias	0°C	21.0	21.5	22.0	V
			25°C	19.9	20.4	20.9	
			50°C	18.4	18.9	19.4	
Power Supply Current	IDD	VDD= 3.3 V VEE-VSS=20.4V FLM=70Hz		-	0.5	0.8	mA
	IEE	PATTERN : □ ■ □ ■ □ ■ ■ □ ■ □ ■ □		-	0.8	1.2	

4. OPTICAL CHARACTERISTICS

AT Vop

ITEM MODE		Cr(Contrast Ratio)						θ (Viewing Angle)		ϕ (Viewing Angle)	
		0°C		25°C		50°C		25°C		25°C	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
Q	L	5	7	4	6	2	3	-	F: 35 R: 30	-	F: 25 L: 25
note		NOTE 6						NOTE 5			

NOTE :

Q : Reflective (3M-RDF)


L : NORMALLY WHITE 6 O'CLOCK

AT $\phi=0^\circ$ $\theta=0^\circ$


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	0°C	550	700	1050	ms	NOTE 2
		25°C	200	250	375		
		50°C	120	150	225		
Response Time (fall)	Tf	0°C	150	200	300	ms	NOTE 2
		25°C	80	100	150		
		50°C	50	60	90		

(NOTE 1)

Definition of Operation Voltage(Vop)

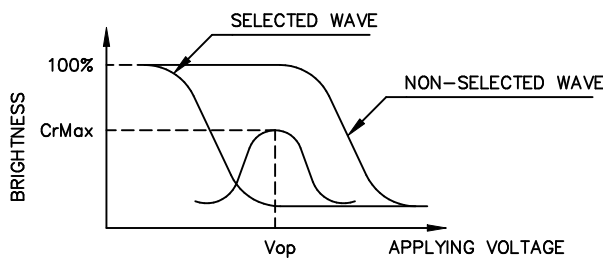

(positive type)

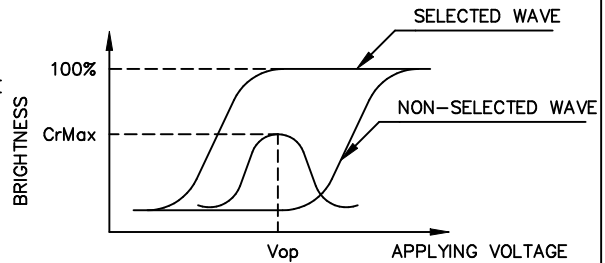


(negative type)

*Conditions


Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(Tr,Tf)

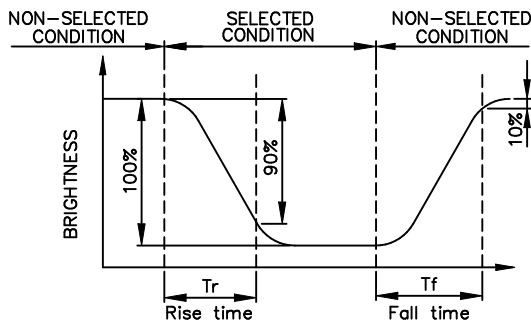

(positive type)

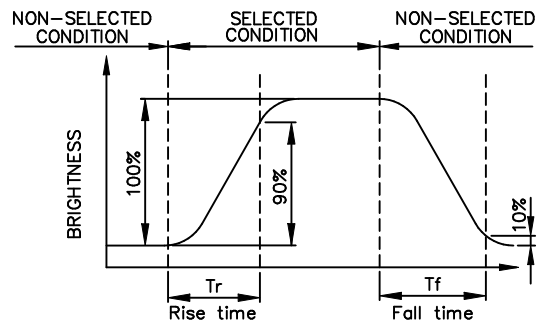


(negative type)

*Conditions


Operating Voltage : Vop
Viewing Angle (θ, ϕ) : (0,0)
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

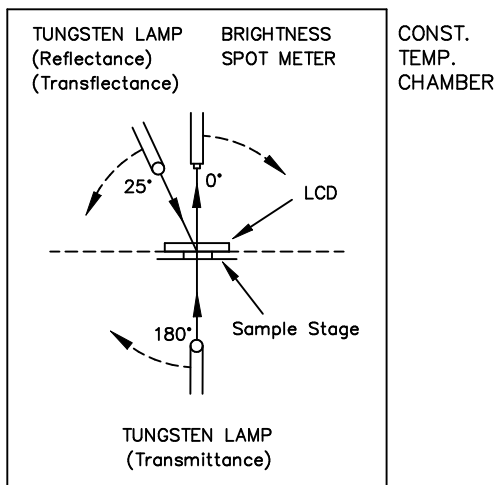


Multiplex Driving (1/N duty 1/a bias)

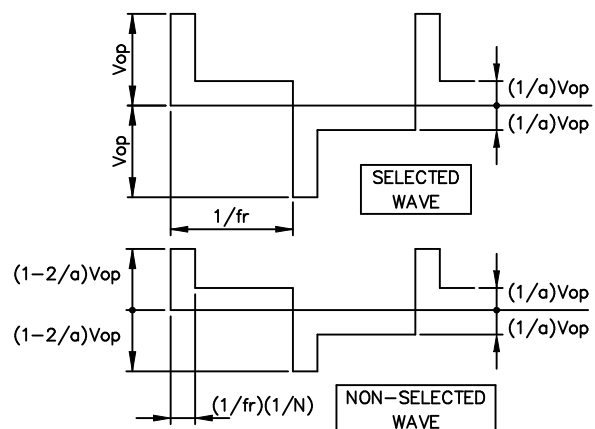


(NOTE 4)

Definition of Viewing Direction

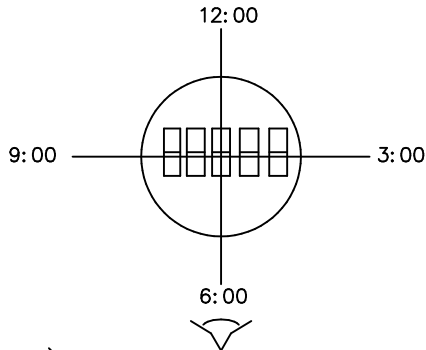

(NOTE 5)

Definition of Viewing Angle

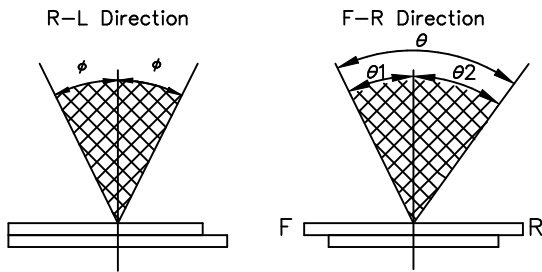

*For This Product
 The Viewing Direction Is 6 O'clock
 So $\theta_1 > \theta_2$


$$\theta = \theta_1 + \theta_2$$

*Conditions


Operating Voltage : V_{op}
 Frame Frequency : 70Hz
 Applying Waveform : 1/N duty 1/a bias
 Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

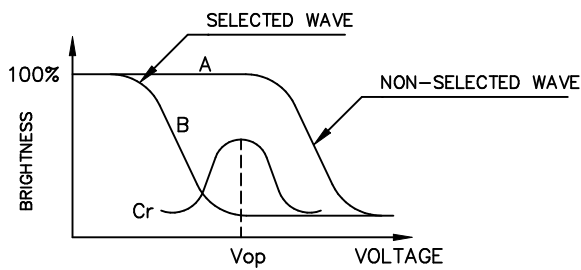

(positive type)

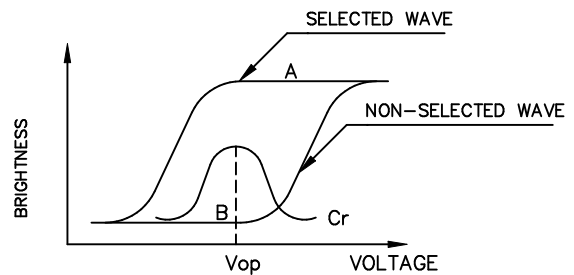


(negative type)

$$\text{Contrast Ratio : } Cr = A/B$$

*Conditions

Viewing Angle : 0
 Frame Frequency : 70Hz
 Applying Waveform : 1/N duty 1/a bias

5. BLOCK DIAGRAM

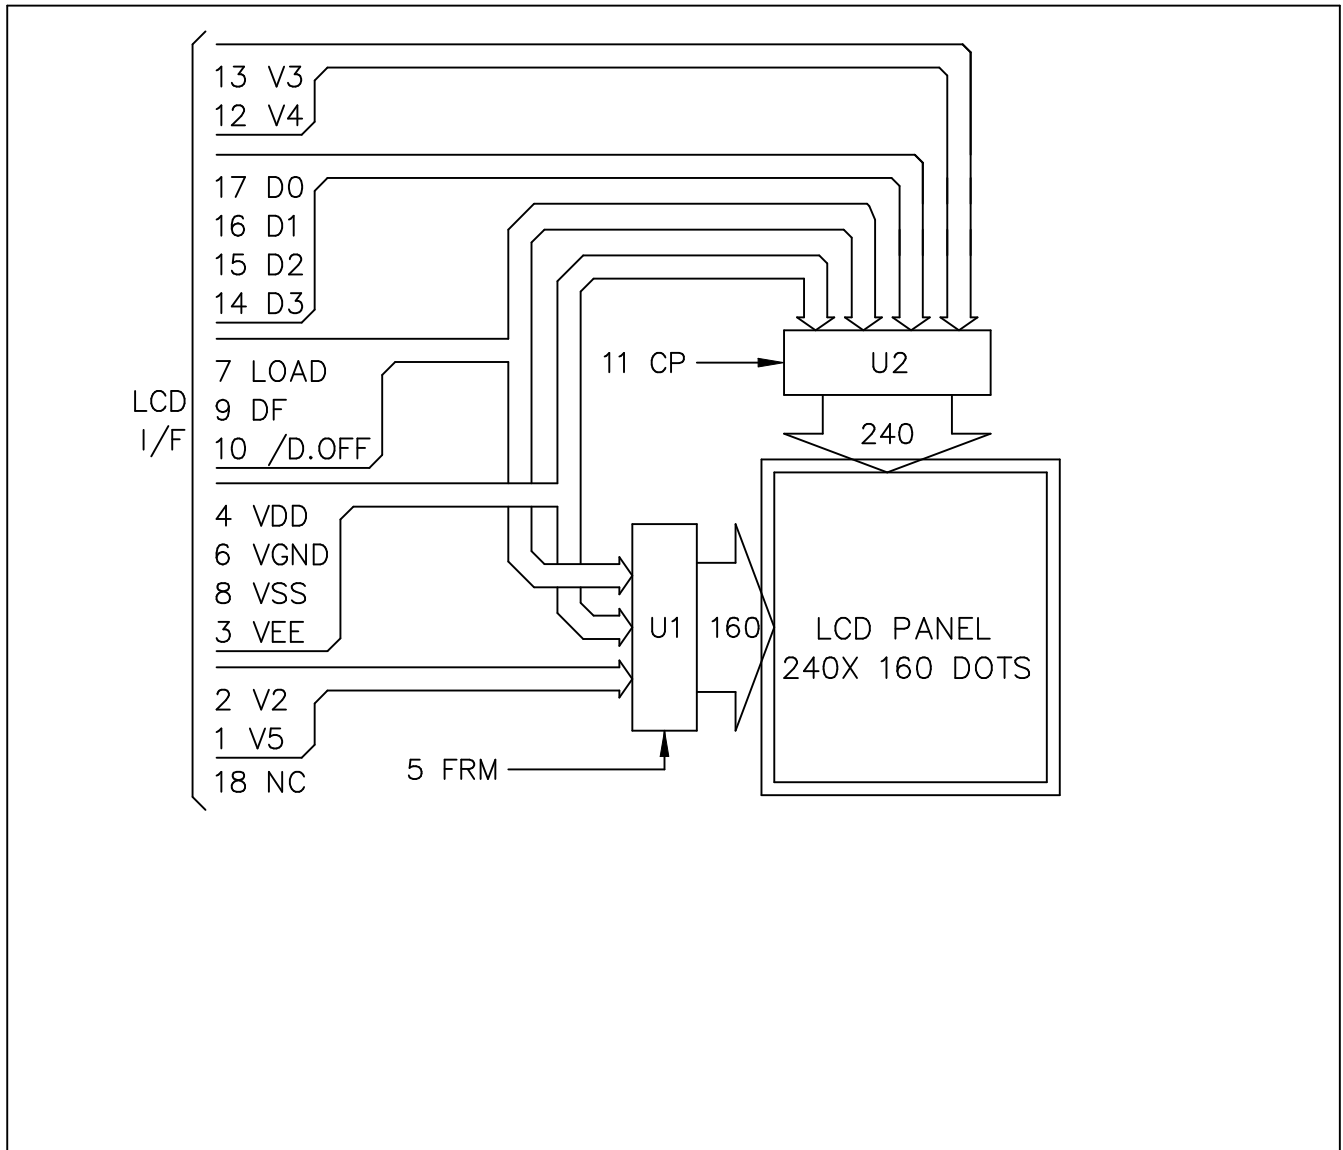

Note1 :


- 1) Controller and bias voltage supply circuit are not included.
- 2) VEE, VGND, V2, V3, V4 and V5 are power supply voltage for LCD.
($VEE > V2 > V3 > V4 > V5 > VGND$)
- 3) The bias is 1/13, $VOP = VEE - VSS = 20.4V$

6. INTERNAL PIN CONNECTION

LCD

Pin No.	Symbol	Function
1	V5	Bias voltage for non-select (Common driver)
2	V2	Bias voltage for non-select (Common driver)
3	VEE	Power supply for LCD (+V)
4	VDD	Power supply for logic (+3.3V)
5	FRM	Frame start signal (Data signal of the shift register of the common driver)
6	VGND	GND, Power supply for LCD
7	LOAD	1) Latch pulse of display data 2) Shift clock for common driver
8	VSS	GND
9	DF	Switch signal to convert LCD drive waveform into AC
10	/D.OFF	H : Display ON, L : Display OFF
11	CP	Clock pulse for segment shift register
12	V4	Bias voltage for non-select (Segment driver)
13	V3	Bias voltage for non-select (Segment driver)
14	D3	Input data signal
15	D2	Input data signal
16	D1	Input data signal
17	D0	Input data signal
18	N.C.	No connectoin

7. POWER SUPPLY

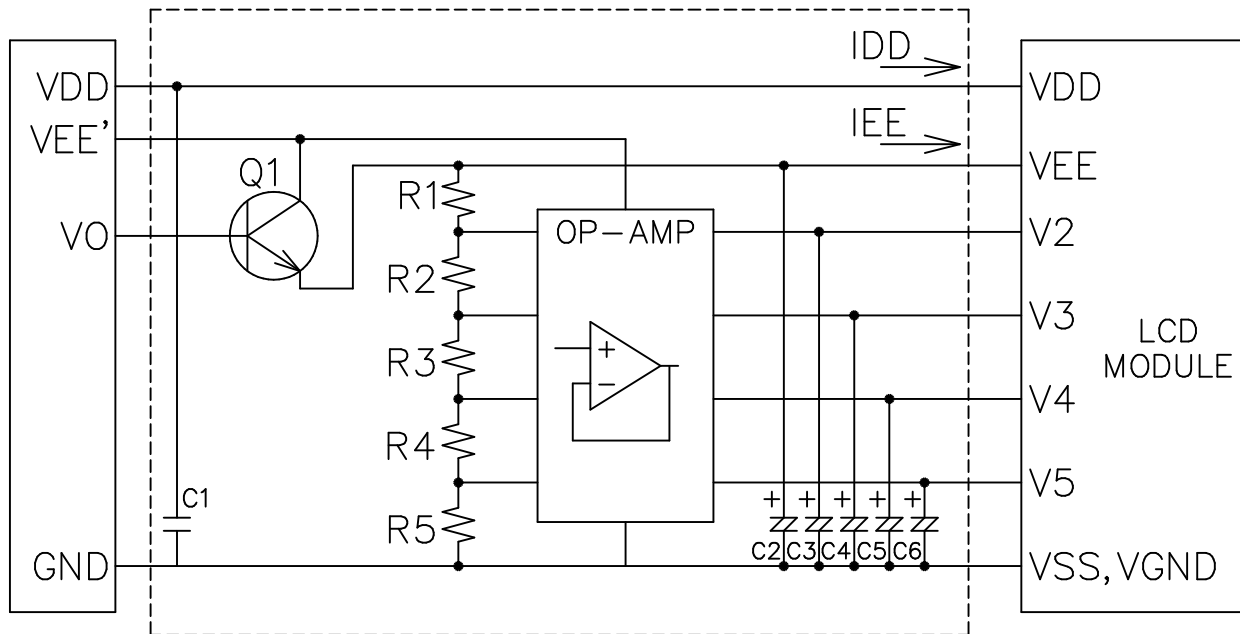

Q1 : 2SC1815

OP-AMP : LP324

$R1=R2=R4=R5=10K\Omega, R3=9R1=91K\Omega(1/13 \text{ Bias})$

$C1=0.1\mu F, C2\sim C6=3.3\mu F$

Note 1 : These are general values.

In case to decrease LCD driving voltage with minimizing bias value, set these values with check display to avoid display's deterioration (response etc).

Note 2 : EL Driving Method

- a. Constant Voltage Source Driving : AC 100 Vrms 400 Hz
- b. Inverter IC Driving : HV823 (Supertex) or SP4428CN(Sipex)

8. TIMING CHARACTERISTICS

8-1. INTERFACE TIMING

@ VDD=3.3V±10%, Ta= 0~50 °C

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
CP Cycle Time	t _C	Fig.a	82	-	-	ns
CP Pulse Width	t _{SWH} ,t _{SWL}	Fig.a	28	-	-	ns
CP Rise/Fall Time	t _{CR} ,t _{CF}	Fig.a	-	-	50	ns
Data Set Up Time	t _{DSU}	Fig.a , Fig.b	20	-	-	ns
Data Hold Time	t _{DHD}	Fig.a , Fig.b	23	-	-	ns
LOAD Cycle Time	t _L	Fig.b	250	-	-	ns
LOAD "H" Pulse Width	t _{LWH}	Fig.a , Fig.b	30	-	-	ns
LOAD Rise/Fall Time	t _{LR} ,t _{LF}	Fig.b	-	-	50	ns
CP To LOAD Delay Time	t _{CL}	Fig.a	30	-	-	ns
LOAD To CP Delay Time	t _{LC}	Fig.a	65	-	-	ns
FRM TO LOAD SETUP TIME	t _{FLS}	Fig.b	30	-	-	ns
FRM TO LOAD HOLD TIME	t _{FLH}	Fig.b	50	-	-	ns

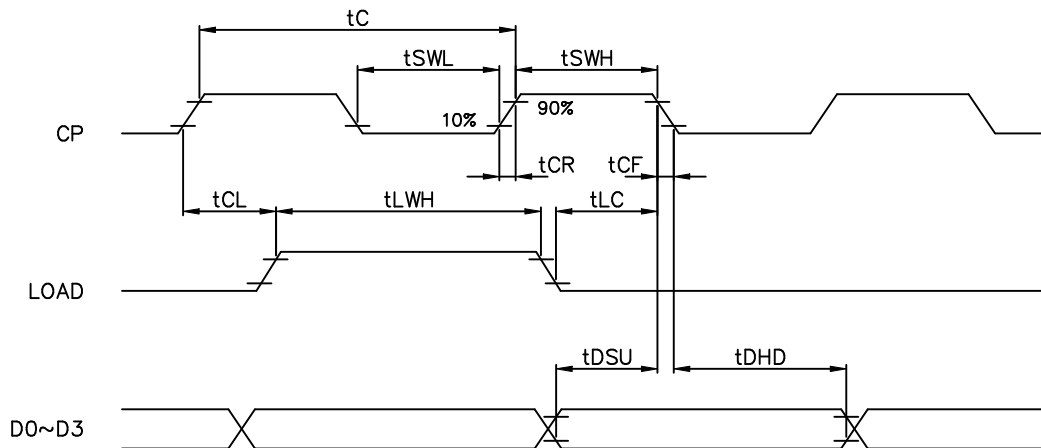


Fig . a Interface timing (SEGMENT)



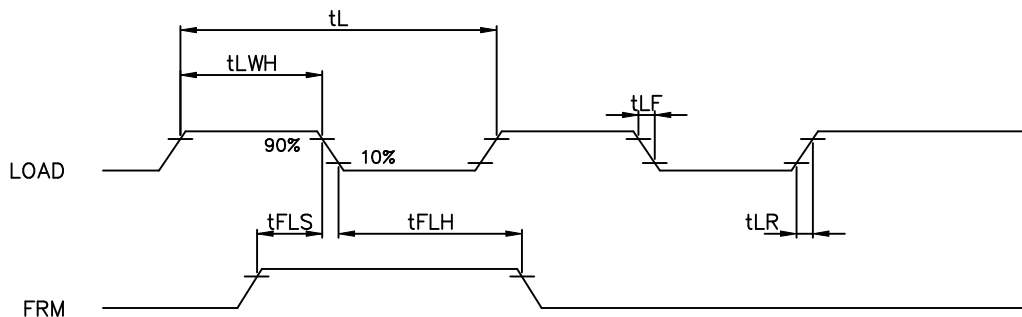


Fig . b Interface timing (COMMON)

8-2.TIMING CHART OF INPUT SIGNAL


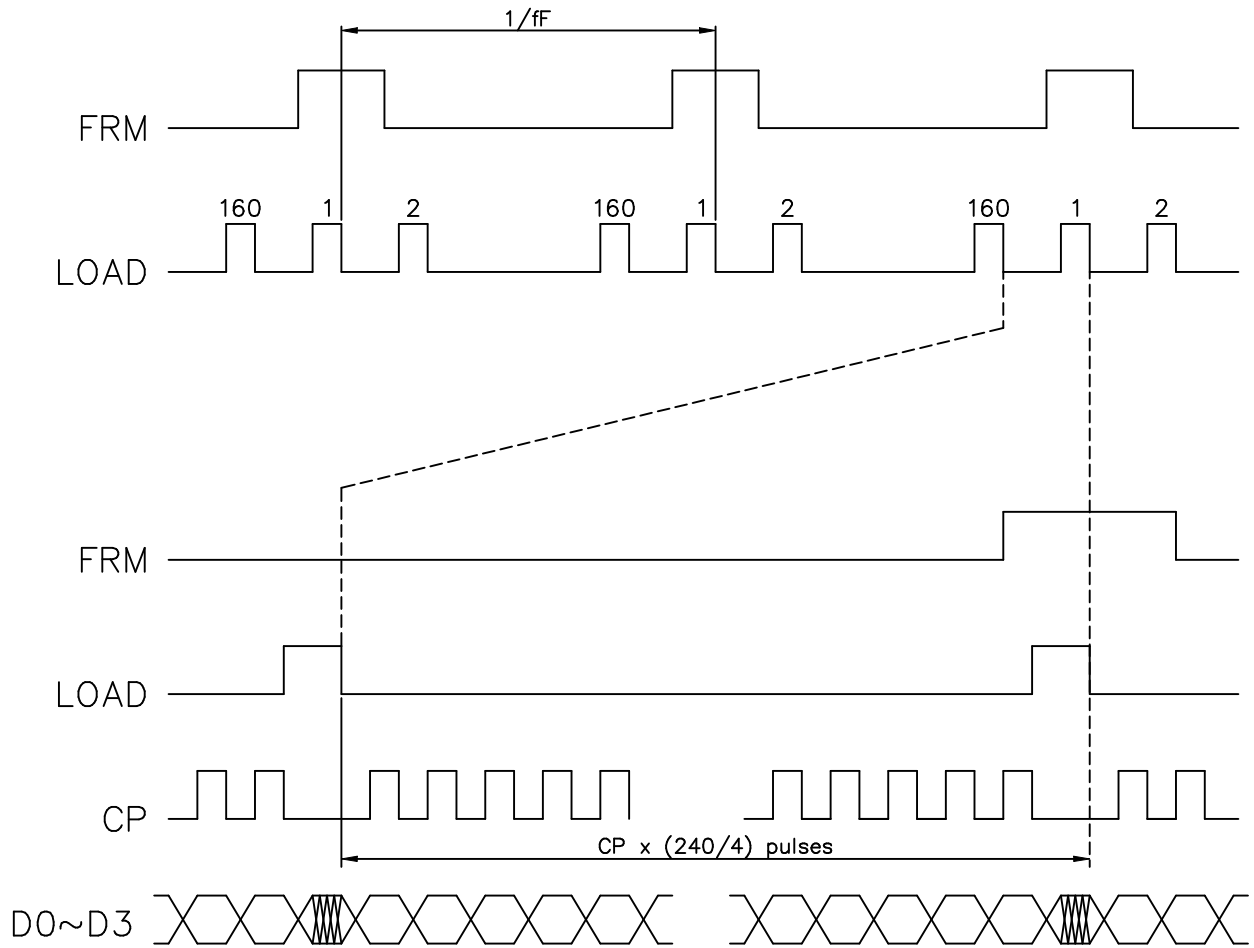


8-3.POWER ON/OFF TIMING

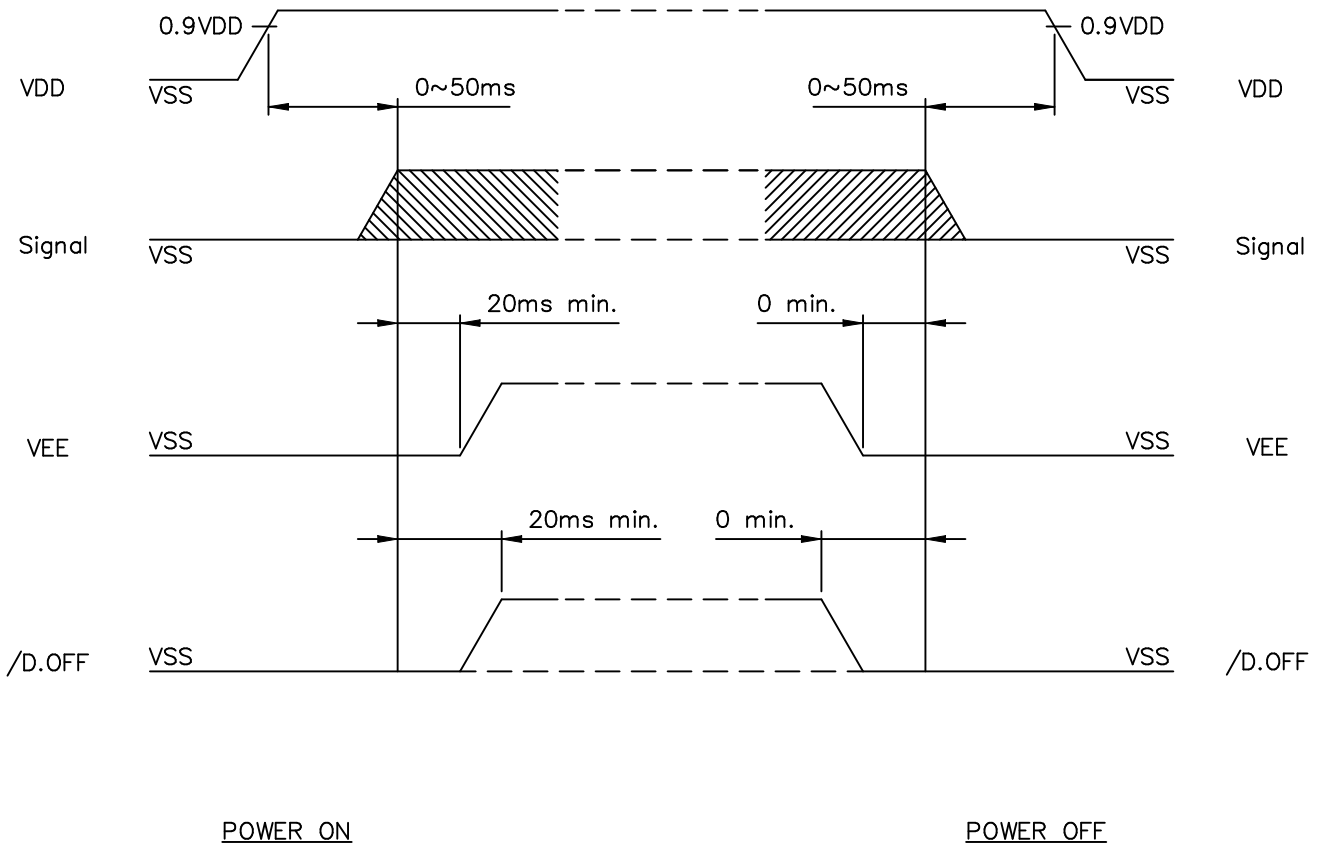


The missing pixels may occur when the LCM is driven beyond above power interface sequence.

8-4.DISPLAY PATTERN

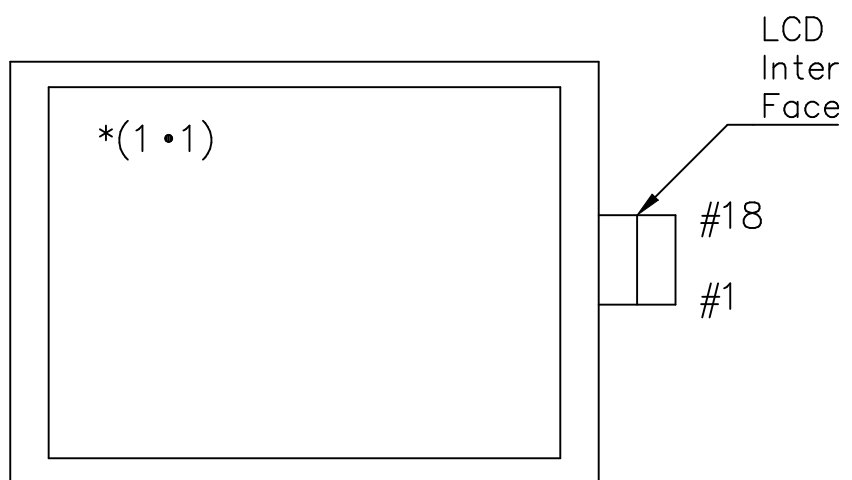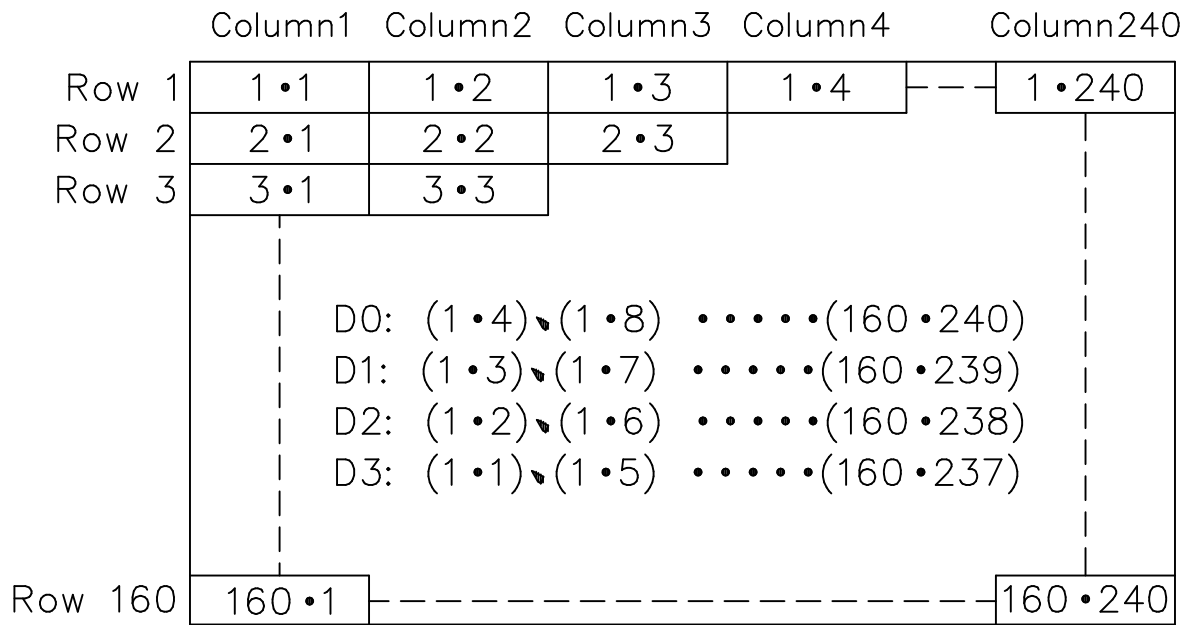

9. RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Storage	70°C	120Hrs		Appearance without defect	
2	Low Temp. Storage	-20°C	120Hrs		Appearance without defect	
3	High Temp. & High Humi. Storage	50°C 90%RH	120Hrs		Appearance without defect	
4	High Temp. Operating Display	50°C	120Hrs		Appearance without defect	
5	Low Temp. Operating Display	0°C	120Hrs		Appearance without defect	
6	Thermal Shock	-20°C,30min → 70°C,30min  (1cycle)			Appearance without defect	10 cycles

Inspection Provision

1. Purpose

The NAN YA inspection provision provides outgoing inspection provision and its expected quality level based on our outgoing inspection of NAN YA LCD produces.

2. Applicable Scope

The NAN YA inspection provision is applicable to the arrangement in regard to outgoing inspection and quality assurance after outgoing.

3. Technical Terms

3-1 NAN YA Technical Terms



4. Outgoing Inspection

4-1 Inspection Method

MIL-STD-105E Level II Regular inspection


4-2 Inspection Standard

	Item		AQL(%)	Remarks
Major Defect	Dots	Opens Shorts Erroneous operation	0.4	faults which substantially lower the practicality and the initial purpose difficult to achieve.
	Solder appearance	Shorts Loose		
	Cracks	Display surface cracks		
	Tablet contact resistance			
	Tablet input load			

		Tablet lineality		0.4	
		Dimensions	External from Dimensions	0.4	
Minor Defect	Inside the glass	Black spots		0.65	faults which appear to pose almost no obstacle to the practicality, effective use, and operation.
	Polarizing plate	Scratches, foreign Matter, air bubbles, and peeling			
	Dots	Pinhole, deformation			
	Color tone	Color unevenness			
	Solder appearance	Cold solder Solder projections			

4-3 Inspection Provisions
*Viewing Area Definition

Fig. 1

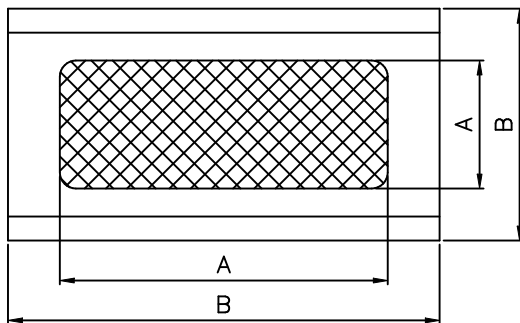

A : Zone Viewing Area
B : Zone Glass Plate Out Line

*Inspection place to be 500 to 1000 lux illuminance uniformly without glaring.
The distance between luminous source(daylight fluorescent lamp and cool white fluorescent lamp) and a sample to be 30cm to 50cm.

*Test and measurement are performed under the following conditions, unless otherwise specified.

Temperature 20± 15°C
Humidity 65± 20%R.H..
Pressure 860~1060hPa(mmbar)

In case of doubtful judgment, it is performed under the following conditions.

Temperature 20± 2°C
Humidity 65± 5%R.H..
Pressure 860~1060hPa(mmbar)













5.Specification for quality check
5-1 Electrical characteristics

NO.	Item	Criterion
1.	Non operational	Fail
2.	Miss operating	Fail
3.	Missing dot	Fail
4.	Contrast irregular	Fail
5.	Response time	Within Specified value

5-2 External Appearance Defect




NO.	Item	Criterion																		
1.	Black spots, foreign matter, and white spots (Including light leakage due to pinholes of polarizing plates, etc.)	<p>(1)-1-Spots(At non lighting condition)</p> <table border="1" data-bbox="730 477 1377 763"> <thead> <tr> <th>Average Diameter(mm):D</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$D \leq 0.1$</td> <td>Ignore</td> </tr> <tr> <td>$0.1 < D \leq 0.2$</td> <td>5</td> </tr> <tr> <td>$0.2 < D \leq 0.3$</td> <td>2</td> </tr> <tr> <td>$0.3 < D$</td> <td>0</td> </tr> </tbody> </table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p> <p>(1)-2-Blurred Spots(At lighting condition)</p> <table border="1" data-bbox="730 1189 1377 1429"> <thead> <tr> <th>Average Diameter(mm):D</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$D \leq 0.3$</td> <td>Ignore</td> </tr> <tr> <td>$0.3 < D \leq 0.75$</td> <td>5</td> </tr> <tr> <td>$0.75 < D$</td> <td>0</td> </tr> </tbody> </table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p>	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.1$	Ignore	$0.1 < D \leq 0.2$	5	$0.2 < D \leq 0.3$	2	$0.3 < D$	0	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.3$	Ignore	$0.3 < D \leq 0.75$	5	$0.75 < D$	0
Average Diameter(mm):D	Number of pieces permitted																			
$D \leq 0.1$	Ignore																			
$0.1 < D \leq 0.2$	5																			
$0.2 < D \leq 0.3$	2																			
$0.3 < D$	0																			
Average Diameter(mm):D	Number of pieces permitted																			
$D \leq 0.3$	Ignore																			
$0.3 < D \leq 0.75$	5																			
$0.75 < D$	0																			

1.	Line	<p>(1)-1-Lines(At non lighting condition)</p> <table border="1" data-bbox="730 427 1473 712"> <thead> <tr> <th>Width(mm): W</th> <th>Length(mm):L</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$W \leq 0.03$</td> <td>Ignore</td> <td>Ignore</td> </tr> <tr> <td>$0.03 < W \leq 0.08$</td> <td>$L \leq 4$</td> <td>2</td> </tr> <tr> <td>$0.08 < W \leq 0.1$</td> <td>$L \leq 1$</td> <td>1</td> </tr> </tbody> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p> <p>(1)-2-Blurrerd Lines(At lighting condition)</p> <table border="1" data-bbox="730 1019 1473 1303"> <thead> <tr> <th>Width(mm): W</th> <th>Length(mm):L</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$W \leq 0.03$</td> <td>Ignore</td> <td>Ignore</td> </tr> <tr> <td>$0.03 < W \leq 0.08$</td> <td>$L \leq 3$</td> <td>6</td> </tr> <tr> <td>$0.08 < W$</td> <td>$3 < L$</td> <td>None</td> </tr> </tbody> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p>	Width(mm): W	Length(mm):L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 4$	2	$0.08 < W \leq 0.1$	$L \leq 1$	1	Width(mm): W	Length(mm):L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 3$	6	$0.08 < W$	$3 < L$	None
Width(mm): W	Length(mm):L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 4$	2																								
$0.08 < W \leq 0.1$	$L \leq 1$	1																								
Width(mm): W	Length(mm):L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 3$	6																								
$0.08 < W$	$3 < L$	None																								
2.	Scratches(Glass, reflection plates, and polarizing plates)	In accordance with black spots. (At non lighting condition)																								
3.	Color irregular	Not remarkable color irregular.																								
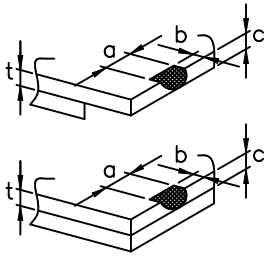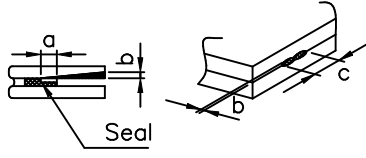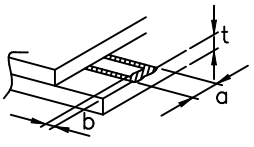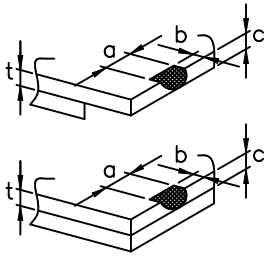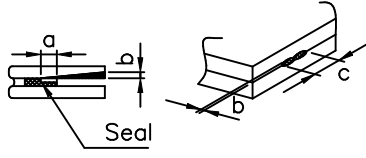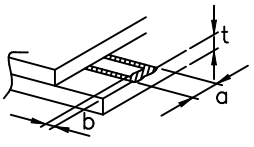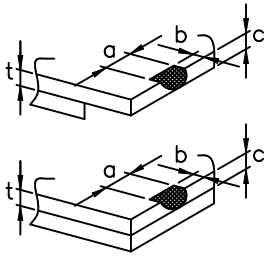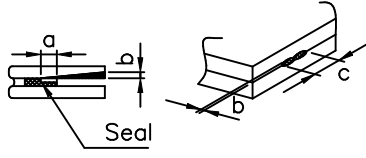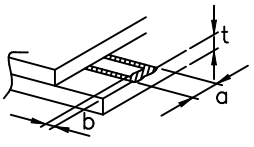
<p>4. Air bubbles polarizing plates, and reflection plates</p>	<table border="1" data-bbox="730 380 1248 667"> <tr> <th data-bbox="730 380 989 524">Average Diameter (mm): D</th> <th data-bbox="989 380 1248 524">Number of pieces permitted</th> <td data-bbox="1248 380 1495 667" rowspan="2">Average diameter = (Long diameter + Short diameter)/2</td> </tr> <tr> <td data-bbox="730 524 989 667">D ≤ 0.3 0.3 < D</td> <td data-bbox="989 524 1248 667">Ignore 0</td> </tr> </table> <p data-bbox="730 683 1495 779">Note that when there are 4 pieces or more, they are not to be concentrated.</p>		Average Diameter (mm): D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2	D ≤ 0.3 0.3 < D	Ignore 0						
Average Diameter (mm): D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2											
D ≤ 0.3 0.3 < D	Ignore 0												
<p>5. Cracks</p>	<table border="1" data-bbox="683 779 1495 1964"> <tr> <td data-bbox="683 779 1085 1169"> <p>(1) General crack</p>  </td> <td data-bbox="1085 779 1495 1169"> <p>$a \leq 5$ $b \leq 2$ $c \leq t$</p> <p>Where, a and b are ignored when less than or equal 0.5. The numbers of pieces are set at up to 5 pieces.</p> </td> </tr> <tr> <td data-bbox="683 1169 1085 1361"> <p>(2) Corner crack</p>  </td> <td data-bbox="1085 1169 1495 1361"> <p>$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$</p> </td> </tr> <tr> <td data-bbox="683 1361 1085 1635"> <p>(3) Seal portion crack</p>  </td> <td data-bbox="1085 1361 1495 1635"> <p>$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$</p> <p>The numbers of pieces are set at up to 5 pieces.</p> </td> </tr> <tr> <td data-bbox="683 1635 1085 1870"> <p>(4) ITO Pin crack</p>  </td> <td data-bbox="1085 1635 1495 1870"> <p>$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$</p> </td> </tr> <tr> <td data-bbox="683 1870 1085 1964"> <p>(5) Progressive cracks</p> </td> <td colspan="2" data-bbox="1085 1870 1495 1964"> <p>All taken to be unacceptable.</p> </td> </tr> </table>		<p>(1) General crack</p> 	<p>$a \leq 5$ $b \leq 2$ $c \leq t$</p> <p>Where, a and b are ignored when less than or equal 0.5. The numbers of pieces are set at up to 5 pieces.</p>	<p>(2) Corner crack</p> 	<p>$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$</p>	<p>(3) Seal portion crack</p> 	<p>$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$</p> <p>The numbers of pieces are set at up to 5 pieces.</p>	<p>(4) ITO Pin crack</p> 	<p>$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$</p>	<p>(5) Progressive cracks</p>	<p>All taken to be unacceptable.</p>	
<p>(1) General crack</p> 	<p>$a \leq 5$ $b \leq 2$ $c \leq t$</p> <p>Where, a and b are ignored when less than or equal 0.5. The numbers of pieces are set at up to 5 pieces.</p>												
<p>(2) Corner crack</p> 	<p>$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$</p>												
<p>(3) Seal portion crack</p> 	<p>$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$</p> <p>The numbers of pieces are set at up to 5 pieces.</p>												
<p>(4) ITO Pin crack</p> 	<p>$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$</p>												
<p>(5) Progressive cracks</p>	<p>All taken to be unacceptable.</p>												

6.	Outer dimensions	Should be with in the tolerance.
7.	Newton ring(touch panel)	Orbicular of interference fringes is not allowed in the optimum contrast within the active area under viewing angle.
8.	Soldering	Should be no defective soldering such as shorting, loose terminal cold solder, peeling of printed circuit board pattern, improper mouting position, etc.

5-3 Dot Appearance Defect

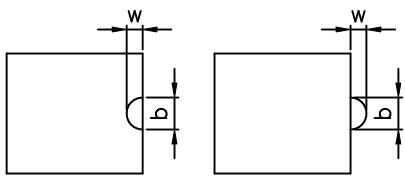NO.	Item	Criteria
1.	Pinhole	 <p>Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken be with in 10 units. Note that they are not to be concentrated.</p>
2.	Missing	 <p>Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken to be with in 10 units.</p>
3.	Thick and thin display	 <p>Taken to be within $\pm 1.5\%$ of display character width(a) and height(b).</p>

NOTICE:

• SAFETY

- 1.If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin.
- 2.If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.

• HANDLING




- 1.Avoid static electricity which can damage the CMOS LSI.
- 2.Do not remove the panel or frame from the module.
- 3.The polarizing plate of the display is very fragile. So, please handle it very carefully.
- 4.Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- 5.Do not use ketonics solvent & Aromatic solvent, use a soft cloth soaked with a cleaning naphtha solvent.

• STORAGE


- 1.Store the panel or module in a dark place where the temperature is $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$ and the humidity is below 65% RH.
- 2.Do not place the module near organics solvents or corrosive gases.
- 3.Do not crush, shake, or jolt the module.

• TERMS OF WARRANT

- 1.Acceptance inspection period
The period is within one month after the arrival of contracted commodity at the buyer's factory site.
- 2.Applicable warrant period
The period is within twelve months since the date of shipping out under normal using and storage conditions.

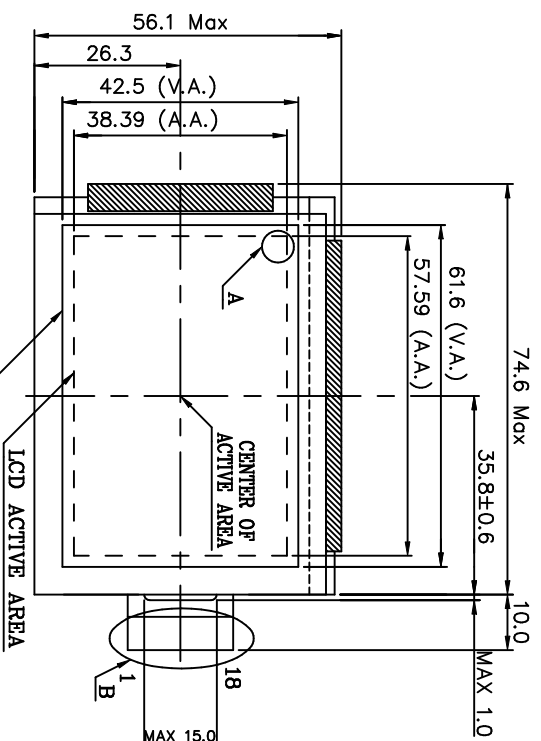

VIEWING DIRECTION



NOTE :
 1. RESOLUTION : 240 x 160 DOTS
 2. DRIVER IC : IST3023TC0 or compatible
 IST3024TA0 or compatible

① LCD CONNECTION

PIN NOS	SYMBOL	FUNCTION	PIN NOS	SYMBOL	FUNCTION
1	V5	Bias voltage for non-select (Common driver)	9	DF	Switch signal to convert LCD driver waveform into AC
2	V2	Bias voltage for non-select (Common driver)	10	/D.OFF	H.Display ON, L.Display OFF
3	VEE	Power supply for LCD (+V)	11	CP	Clock Pulse for segment shift register
4	VDD	Power supply for logic (+3.3V)	12	V4	Bias voltage for non-select (Segment driver)
5	FRM	Frame start signal (Data Signal of the shift register of the common driver)	13	V3	Bias voltage for non-select (Segment driver)
6	VGND	GND, Power supply for LCD	14	D3	Input data signal
7	LOAD	(1) Latch pulse of display data (2) Shift clock for common driver	15	D2	Input data signal
8	VSS	GND	16	D1	Input data signal
			17	D0	Input data signal
			18	NC	No connectoin

GENERAL TOLERANCE LIST

DIMENSION	TOLERANCE
L ≤ 6	±0.25 (mm)
6 < L ≤ 18	±0.3 (mm)
18 < L ≤ 50	±0.4 (mm)
50 < L ≤ 125	±0.5 (mm)
125 < L	±0.6 (mm)



南亚塑膠工業股份有限公司 NAN YA PLASTICS CORPORATION 製品圖		LTTD75Q227L20S NAME DATE THIRD ANGLE P.	
APPROVE	CHECK	DESIGN	DRAWN
		Campos Chen 94.12.28	Campos Chen 94.12.28
		SCALE	UNIT
		1/1	mm
DWG NO.	M 2 2 7 D D 3 A		

THE NOTES OF LCM USING

LCM is easy to damage.


Please follow the notes as bellows, and be careful of handling!

Correct handling

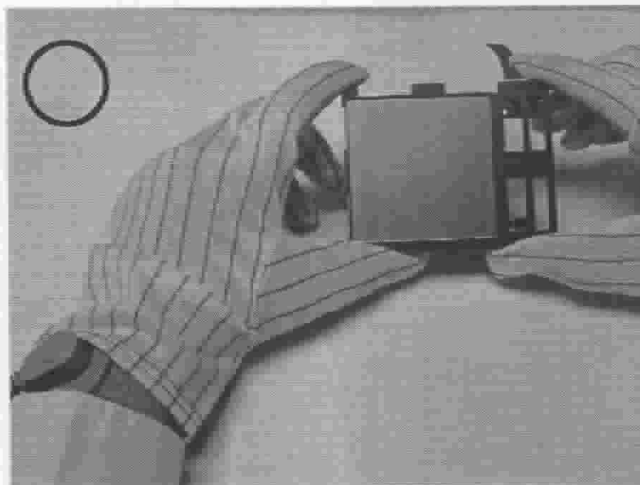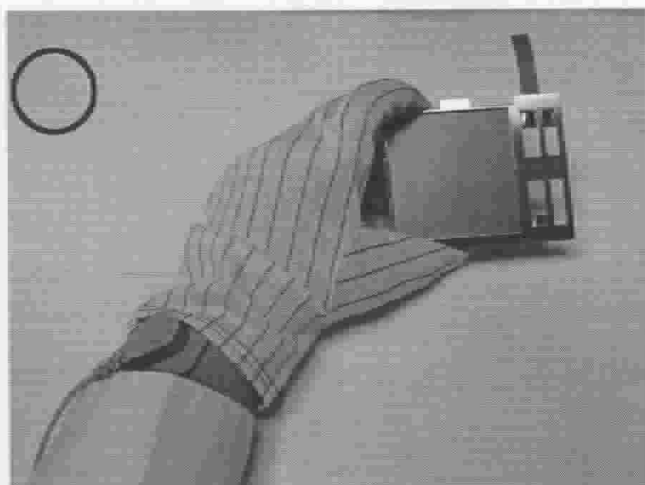


As above picture, please handle with glove by LCM edges and full EOS/ESD protection.


Incorrect handling

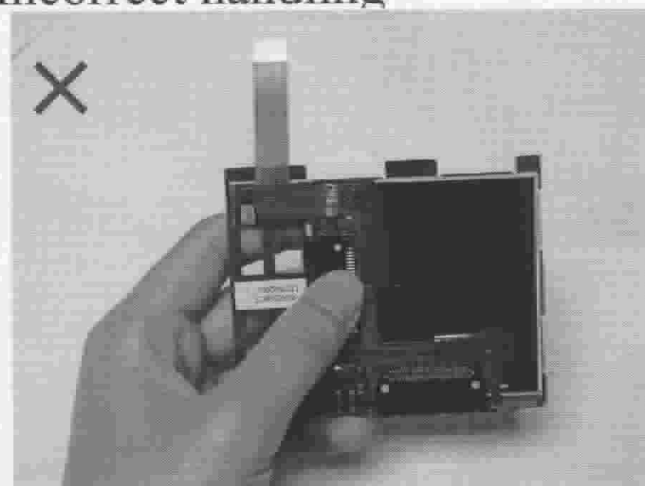


Please don't touch IC directly.

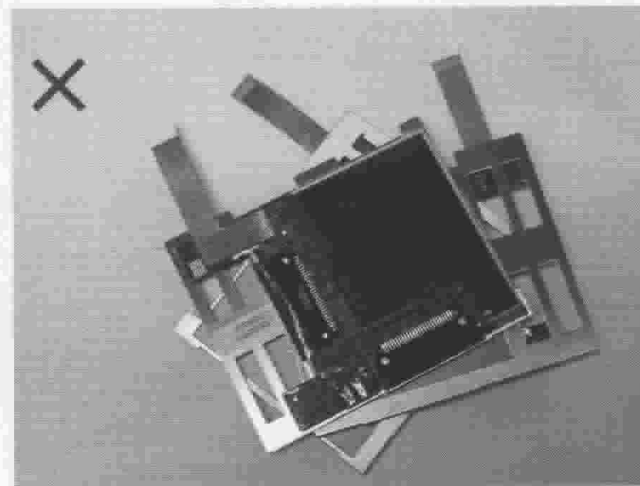

Please don't put one on another LCM.

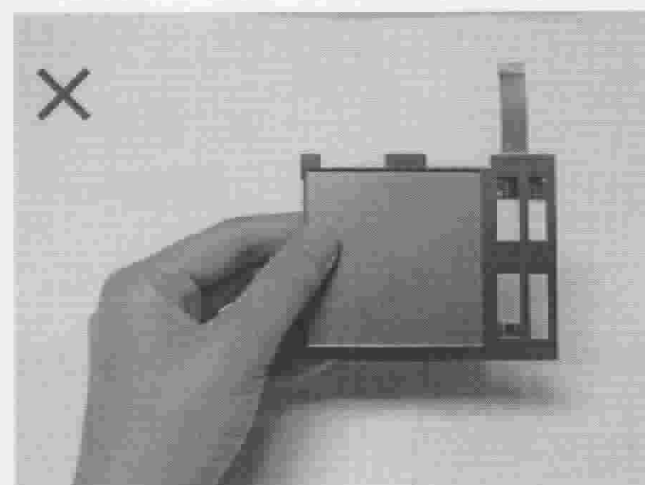

Please don't hold the surface of LCM.

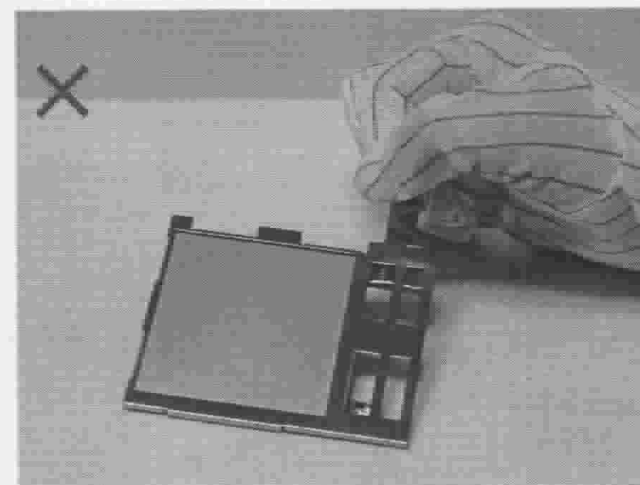



Please don't stretch interface of output.

THE NOTES OF LCD USING

LCD is easy damage.


Please follow notes as bellows, and be careful of handling!

Correct handling

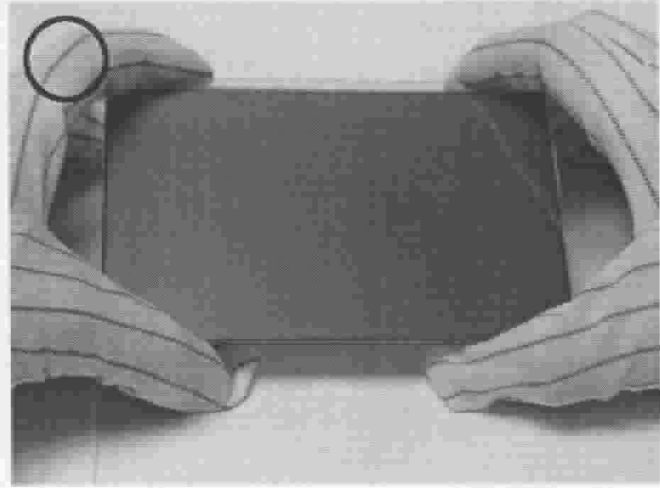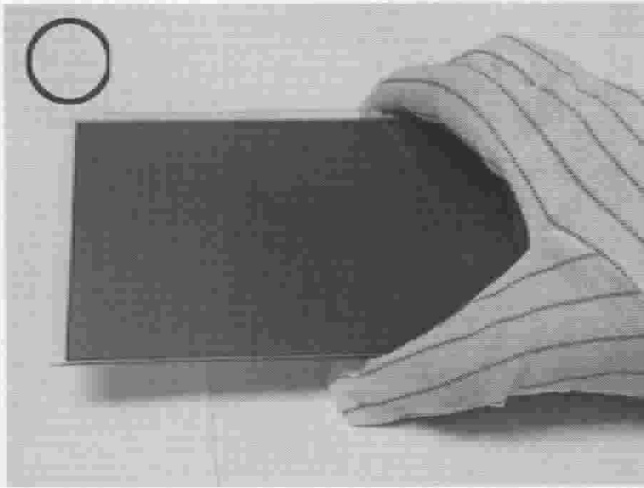


As above picture, please handle with glove by LCD edges and full EOS/ESD protection.


Incorrect handling

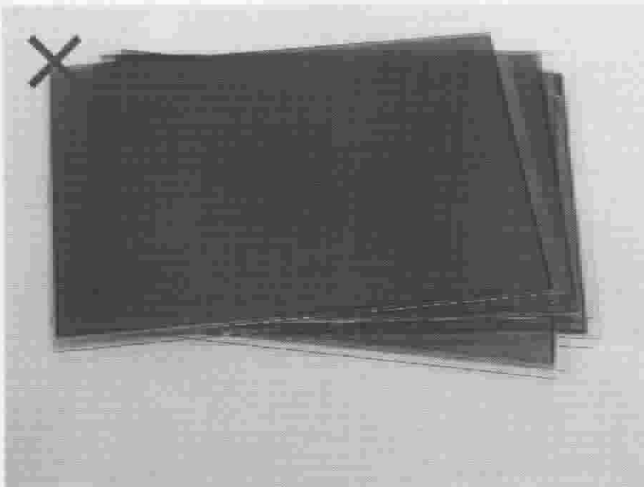


Please don't put one on another LCD.

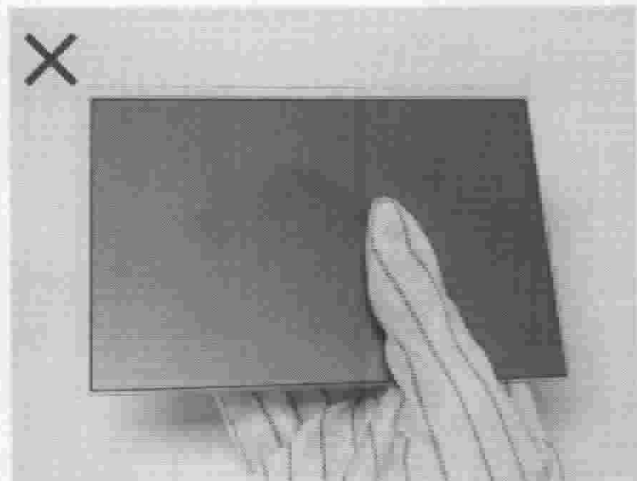

Please don't hold the surface of LCD.

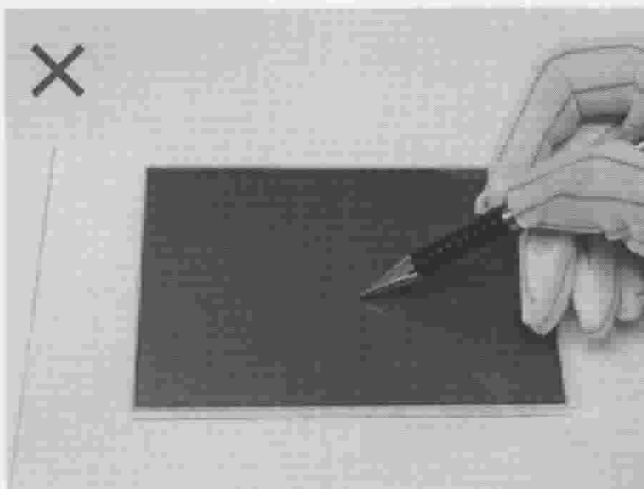

Please don't operate with sharp stick such as sharp pencil.

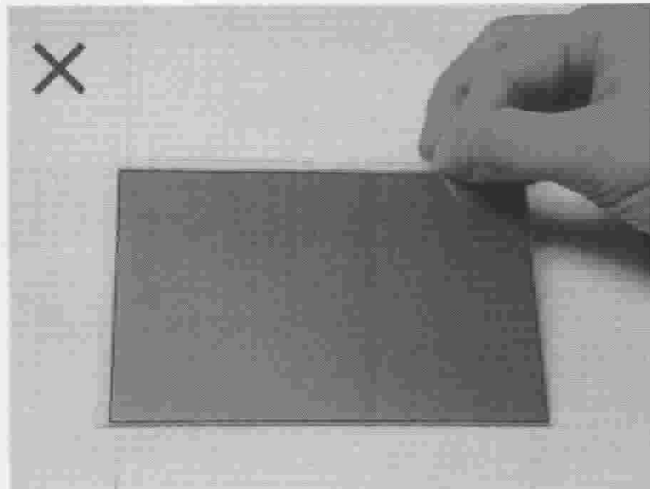

Please don't touch ITO glass without anti-static gloves.

