

# NAN YA PLASTICS CORPORATION

SPECIFICATION OF  
LCD MODULE  
PRODUCT NO.: LTBLDT701G6CS\_

SPEC. NO.: LM701-6B-~~2~~

CUSTOMER
APPROVED BY
DATE:

LCD DEPARTMENT  
ELECTRONIC MATERIALS DIVISION  
NAN YA PLASTICS CORPORATION  
NO.336, NANKAN RD., SEC. 1, LUCHU  
VILLAGE, TAOYUAN COUNTY, TAIWAN  
TEL:886-3-3223751 EXT. 2715~2718  
FAX:886-3-3125803  
E-mail:lcdsales@npc.com.tw

EDITED ON : May.19.2007


Q.C. DEPT.	DESIGN MANAGER	DESIGN CHECK	DESIGNER
			C.Y.CHAN



# 1. MECHANICAL DATA

NO	ITEM	CONTENTS	UNIT
1	Product No.	LTBLDT701G6CS_	-
2	Module Size	205.5 (W) x 141.0 (H) x 7.0 max (D)	mm
3	Dot Size	0.21 (W) x 0.21 (H)	mm
4	Dot Pitch	0.23 (W) x 0.23 (H)	mm
5	Number of Dots	640 (W) x 480 (H)	Dot
6	Duty	1/240	-
7	LCD Display Mode	FSTN, Normally Black / Negative Image	-
8	Rear Polarizer	Transmissive Type	-
9	Viewing Direction	6	O'clock
10	Backlight	CCFL	-
11	Controller	Excluded	-
12	DC/DC Converter	Excluded	-
13	Touch Panel	Excluded	-
14	Weight	310 (Approx.)	g

Note :

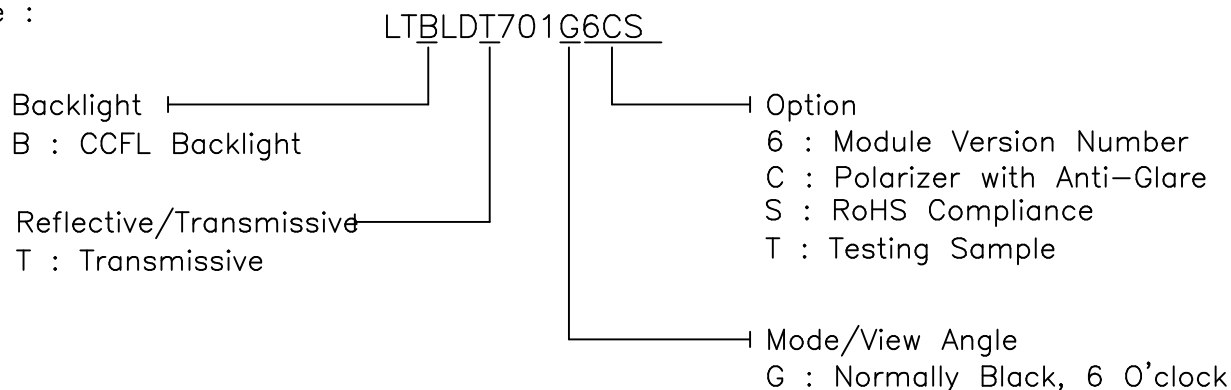

**RoHS Compliance.**

Nan Ya guarantees that this project doesn't include any materials (6 materials) or includes less than specified quantities which are regulated by RoHS Compliance.

REV/DATE	R0/ 12.22.04'					BY T.M. Chen
----------	------------------	--	--	--	--	-----------------

## 2. ABSOLUTE MAXIMUM RATINGS

### (1) ELECTRICAL ABSOLUTE RATINGS

VSS=0 V Standard

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	6.5	V	
Input Voltage	VEE-VSS	0	27	V	
Static Electricity	-	-	-	-	Note 1

Note 1 LCM should be grounded during handling LCM.

### (2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	NORMAL TEMP.			
	OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	0	50	-20	70
Humidity (Without Condensation)	Note 2,4		Note 3,4	

Note 2  $T_a \leq 50^\circ\text{C}$  : 80%RH max

Note 3 Please refer to item of reliability test

Note 4 Background color will change slightly depending on ambient temperature.  
That phenomenon is reversible.

### 3. ELECTRICAL CHARACTERISTICS

#### 3-1. ELECTRICAL CHARACTERISTICS OF LCD

ITEM		SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	
Power Supply for Logic		VDD-VSS	-	3.0	3.3	3.6	V	
				4.75	5.0	5.25		
Input Voltage		VIL	L level	VSS	0.2VDD	-	V	
		VIH	H level	0.8VDD	VDD	-	V	
LCM Recommend LCD Module Driving Voltage		VEE-VSS	VDD=5.0V	0°C	22.9	23.3	23.7	V
				25°C	21.9	22.3	22.7	
				50°C	21.0	21.4	21.8	
Power Supply Current for LCM		IDD	VDD=5.0V VEE-VSS=22.3V FLM=70Hz PATTERN : ■ □ ■ □ □ ■ □ ■	-	3.0	6.0	mA	
		IEE		-	15	30		
LCM	Surface Luminance	Ls	Vin=10.1V IL=5mA	PATTERN: (Dots All On)	70.0	85.5	-	cd/m <sup>2</sup>
				PATTERN: (Dots All Off)	-	13.3	20.0	

### 3-2.ELECTRICAL CHARACTERISTICS OF BACKLIGHT

Used Lamp Rating

Temp.=25°C

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Lamp Voltage	$V_L$	-	295	-	Vrms	-
Lamp current	$I_L$	4	5	6	mArms	-
Lamp power consumption	$P_L$	-	1.48	-	W	(*1)
Starting voltage	$V_S$	-	-	430	Vrms	Ta=25°C
		-	-	500	Vrms	Ta=0°C
Lamp life time	$L_L$	-	20000	-	hrs	at $I_L = 5$ mArms Ta=25°C (*2)

(\*1) Power consumption excluded inverter loss .

(\*2) Lamp life time is defined as follows : The final brightness is at 50% of original brightness .

### 3-3.ELECTRICAL CHARACTERISTICS OF RECOMMENDED INVERTER TDK CXA-L10L

#### 3-3-1 GENERAL SPECIFICATIONS

OPERATION TEMPERATURE : -10°C~60°C

STORAGE TEMPERATURE : -20°C~85°C

DIMENSION : 44.0(L)mm x 21.0(W)mm x MAX 18.0(H)mm

#### 3-3-2 PIN ASSIGNMENTS

INPUT (CN1) CONNECTOR :

OUTPUT (CN2) CONNECTOR :

NO.	FUNCTION
1	VIN
2	GND

NO.	FUNCTION
3	OUT1
4	OUT2
5	OUT GND

#### 3-3-3 RELATIONSHIP BETWEEN VIN & TUBE CURRENT

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Input Voltage	VIN	-	10.1	-	V	
Tube Current	IL	-	5	-	mA	

## 4. OPTICAL CHARACTERISTICS

AT Vop

ITEM MODE		Cr(Contrast Ratio)						$\theta$ (Viewing Angle)		$\phi$ (Viewing Angle)	
		0°C		25°C		50°C		25°C		25°C	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
T	G	5.5	8.0	7.0	10.0	2.8	4.0	-	*F:50 R:26	-	*L:45 R:45
NOTE		NOTE 6						NOTE 5			

\* Under Cr > 2 Condition

NOTE :

T: TRANSMISSIVE


G: NORMALLY BLACK, 6 O'clock

AT  $\phi=0^\circ$   $\theta=0^\circ$


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	0°C	440	550	820	ms	NOTE 2
		25°C	180	234	350		
		50°C	90	110	165		
Response Time (fall)	Tr	0°C	200	250	375	ms	NOTE 2
		25°C	90	110	165		
		50°C	75	95	140		

(NOTE 1)

Definition of Operation Voltage(Vop)

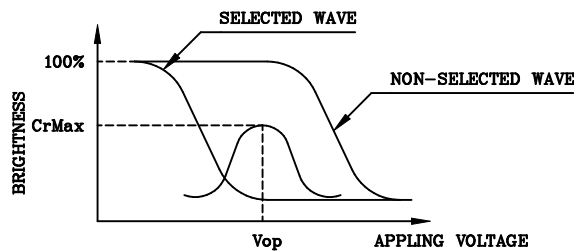

(positive type)

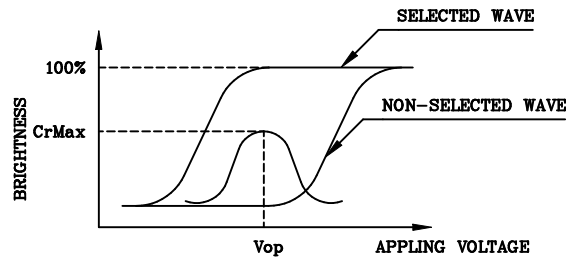


(negative type)

\*Conditions


Viewing Angle : 0  
 Frame Frequency : 70Hz  
 Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(Tr,Tf)

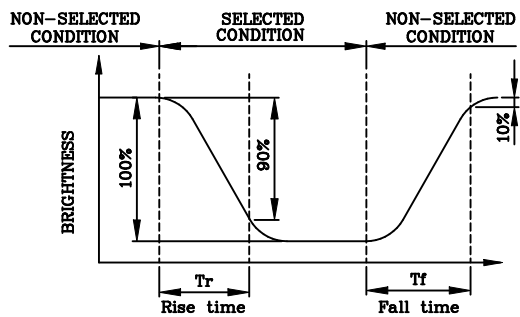

(positive type)

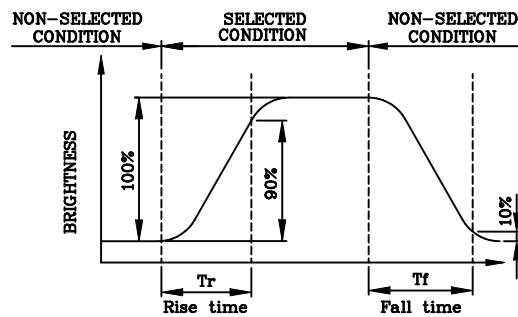



(negative type)

\*Conditions

Operating Voltage : Vop  
 Viewing Angle (θ,φ) : (0,0)  
 Frame Frequency : 70Hz  
 Applying Waveform : 1/N duty 1/a bias


(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

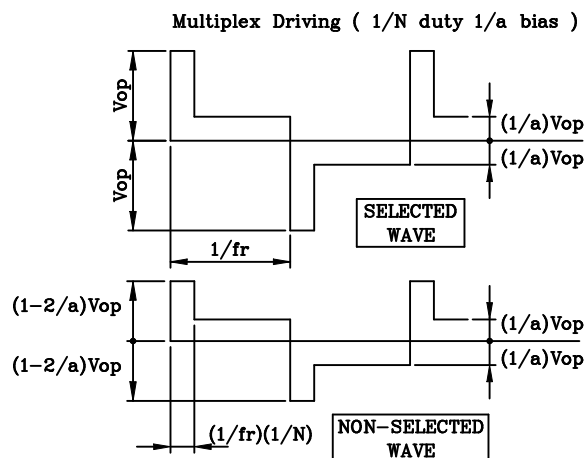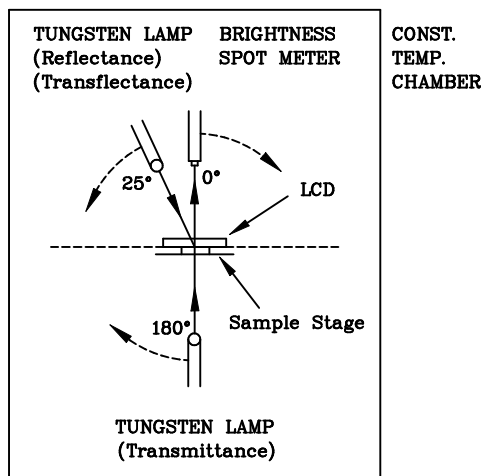



(NOTE 4)

Definition of Viewing Direction

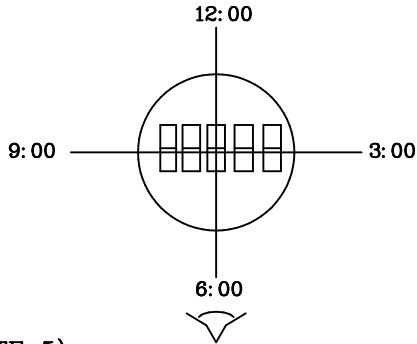

(NOTE 5)

Definition of Viewing Angle

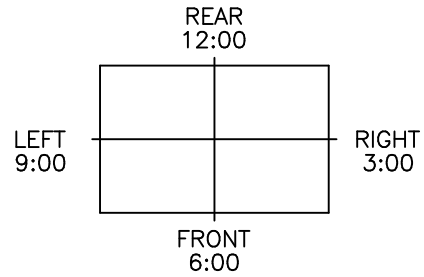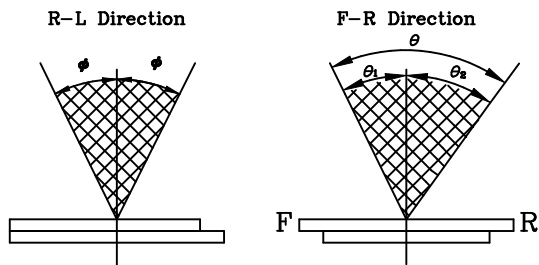

\*For This Product

The Viewing Direction Is 6 O'clock  
 So  $\theta_1 > \theta_2$


$$\theta = \theta_1 + \theta_2$$

\*Conditions


Operating Voltage :  $V_{op}$   
 Frame Frequency : 70Hz  
 Applying Waveform : 1/N duty 1/a bias  
 Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

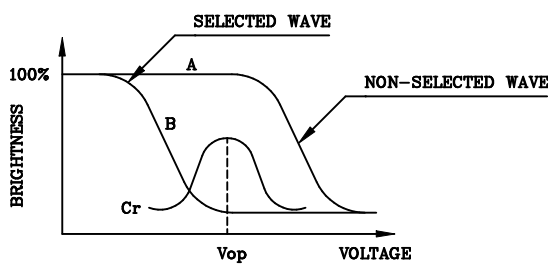

(positive type)

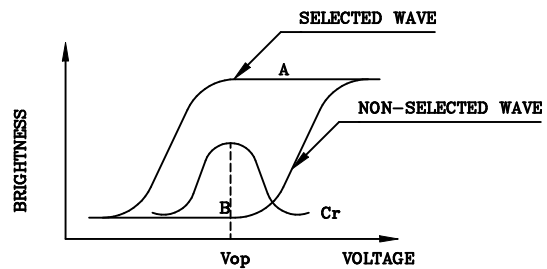


(negative type)

$$\text{Contrast Ratio : } Cr = A/B$$

\*Conditions

Viewing Angle : 0  
 Frame Frequency : 70Hz  
 Applying Waveform : 1/N duty 1/a bias

## 5. BLOCK DIAGRAM

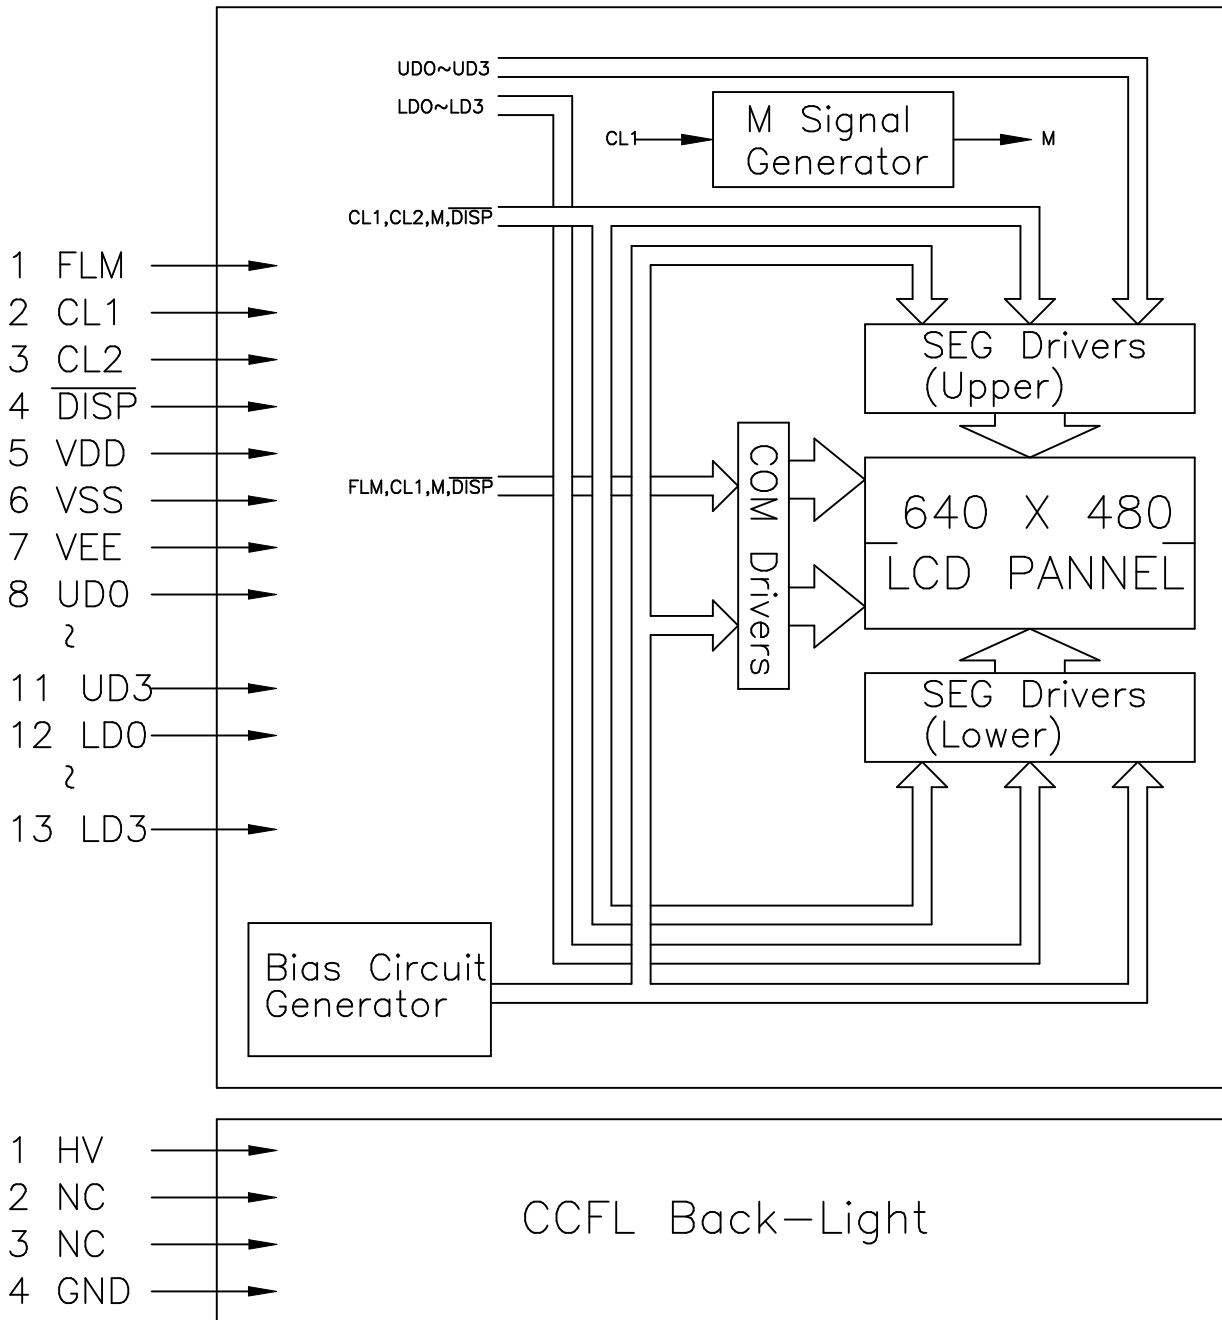

## 6. INTERNAL PIN CONNECTION

### LCD

Pin No.	Symbol	Level	Function
1	FLM	H/L	SCAN START-UP SIGNAL
2	CL1	H→L	DATA LATCH PULSE
3	CL2	H→L	DATA SHIFT PULSE
4	$\overline{\text{DISP}}$	H/L	DISPLAY OFF ("H"=ON,"L"=OFF)
5	VDD	-	POWER SUPPLY FOR LOGIC (+3.3V/+5V)
6	VSS	-	SIGNAL GROUND (GND)
7	VEE	-	POWER SUPPLY FOR LCD (+V)
8	UD0	H/L	DISPLAY DATA (UPPER HALF)
9	UD1		
10	UD2		
11	UD3		
12	LD0	H/L	DISPLAY DATA (LOWER HALF)
13	LD1		
14	LD2		
15	LD3		

### CCFL

Pin No.	Symbol	Level	Function
1	HV	-	HIGH VOLTAGE LINE (INVERTER)
2~3	NC	-	NON CONNECTION
4	GND	-	GROUND LINE (INVERTER)

### LCD

Used connector : MOLEX 53261-1571


Mating connector : MOLEX 51021-1500(HOUSING) X 1 +  
MOLEX 50058-8000(TERMINAL) X 15 or Compatible

### CCFL

Used connector : M63M83-04 (MITSUMI) or compatible

Mating connector : M60-04-30-114P (MITSUMI)  
M60-04-30-134P (MITSUMI)  
M61M73-04 (MITSUMI)

## 7. POWER SUPPLY

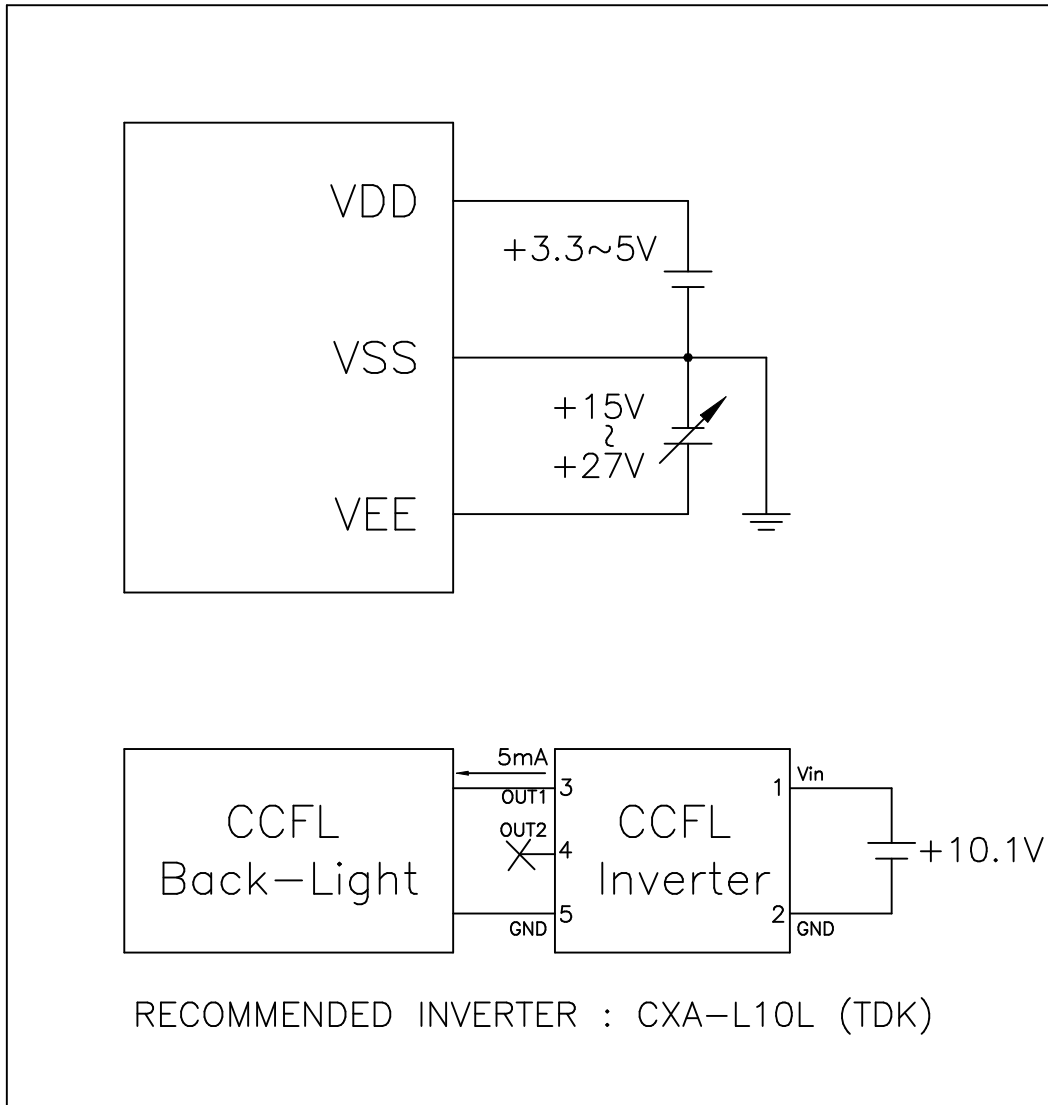


## 8. TIMING CHARACTERISTICS


### 8-1. INTERFACE TIMING

@VDD=2.5~5.5V

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Shift Clock Period	$t_{cp}$	152	-	-	ns
"CL2" PULSE WIDTH	$t_w$	65	-	-	ns
CLOCK RISE, FALL TIME	$t_r, t_f$	-	-	50	ns
DATA SETUP TIME	$t_{dsu}$	50	-	-	ns
DATA HOLD TIME	$t_{dhd}$	40	-	-	ns
"CL2" → "CL1" FALL TIME	$t_{lsu}$	65	-	-	ns
"CL1" → "CL2" FALL TIME	$t_{lc}$	65	-	-	ns
"FLM" SETUP TIME	$t_{SETUP}$	100	-	-	ns
"FLM" HOLD TIME	$t_{HOLD}$	100	-	-	ns
"CL1" PULSE WIDTH	$t_{wc}$	65	-	-	ns

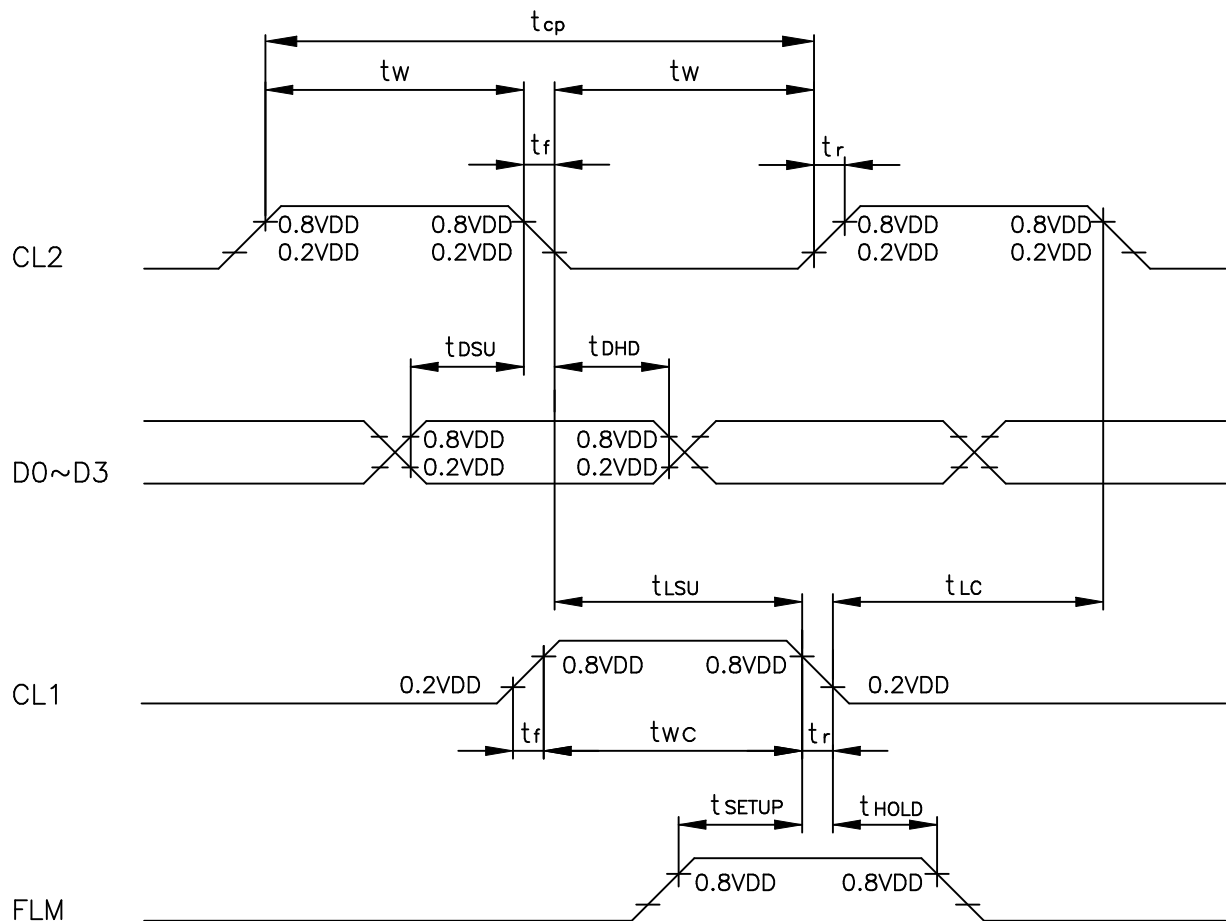


## 8-2. POWER ON/OFF TIMING

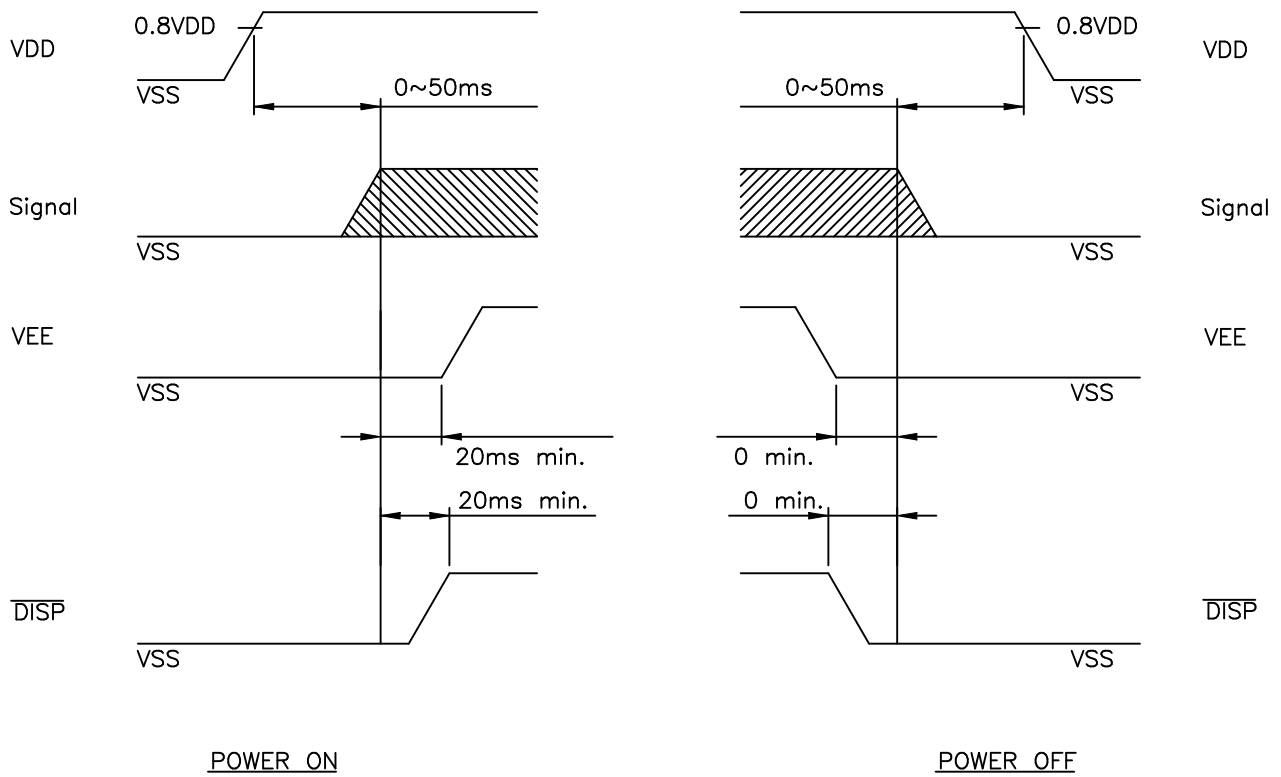


The missing pixels may occur when the LCM is driven beyond above power interface timing sequence.

### 8-3.DISPLAY PATTERN

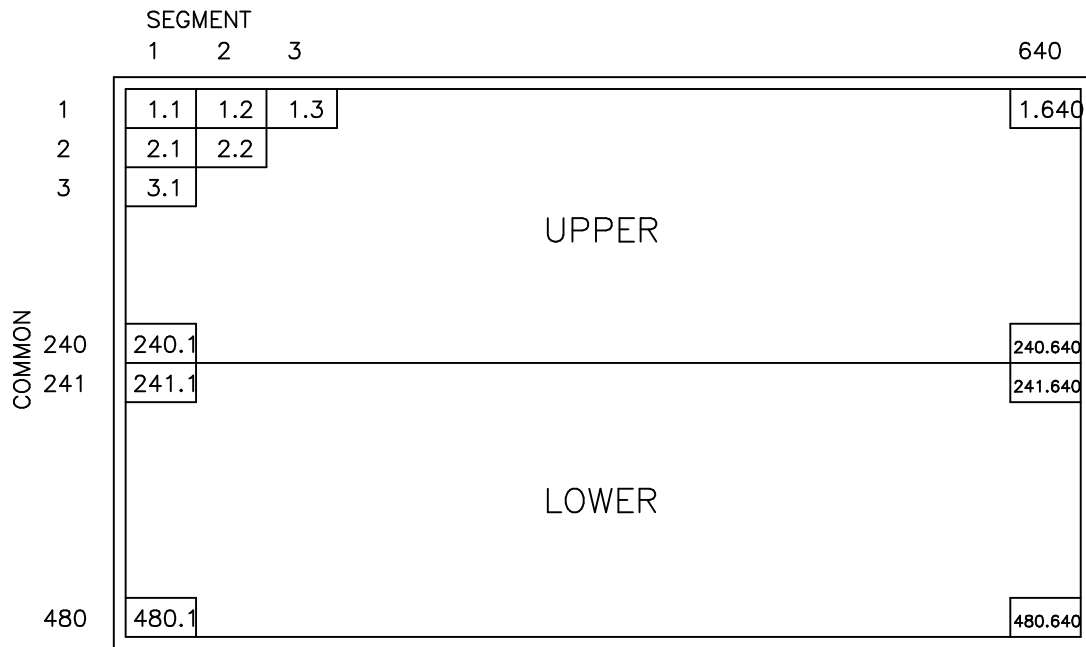


NOTE : 1.1 MEANS 1ST COMMON 1ST SEGMENT DOT

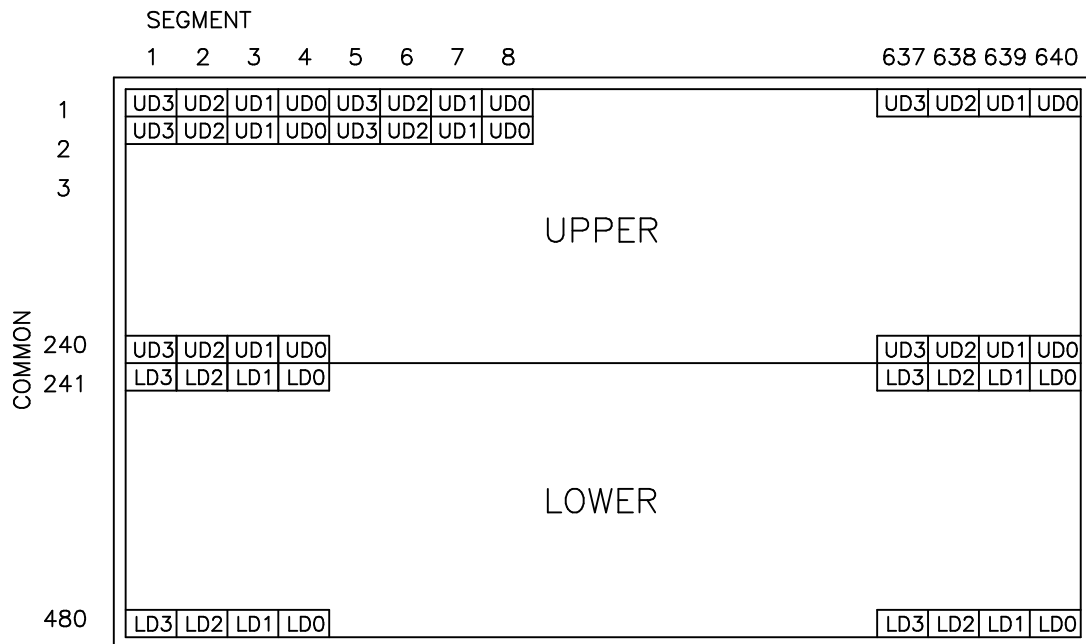

## 9. RELIABILITY TEST

### NORMAL TEMPERATURE RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Storage	70°C	120Hrs		Appearance without defect	
2	Low Temp. Storage	-20°C	120Hrs		Appearance without defect	
3	High Temp. & High Humi. Storage	50°C 90%RH	120Hrs		Appearance without defect	
4	High Temp. Operating Display	50°C	120Hrs		Appearance without defect	
5	Low Temp. Operating Display	0°C	120Hrs		Appearance without defect	
6	Thermal Shock	-20°C, 30min → 70°C, 30min  (1cycle)			Appearance without defect	10 cycles

Inspection Provision

1.Purpose


The NAN YA inspection provision provides outgoing inspection provision and its expected quality level based on our outgoing inspection of NAN YA LCD produces.

2.Applicable Scope

The NAN YA inspection provision is applicable to the arrangement in regard to outgoing inspection and quality assurance after outgoing.

3.Technical Terms

3-1 NAN YA Technical Terms

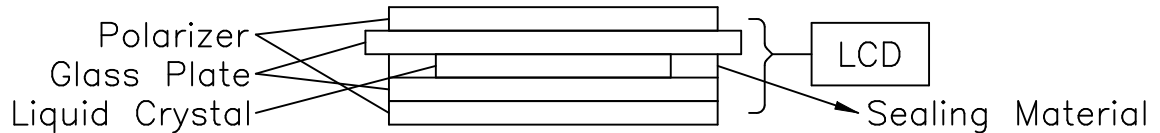

4.Outgoing Inspection Provision

4-1 Inspection Method

MIL-STD-105E Level II Regular inspection


4-2 Inspection Standard

	Item		AQL(%)	Remarks
Major Defect	Dots	Opens Shorts Erroneous operation	0.4	faults which substantially lower the practicality and the initial purpose difficult to achieve.
	Solder appearance	Shorts Loose		
	Cracks	Display surface cracks		

	Dimensions	External from Dimensions	0.4	
Minor Defect	Inside the glass	Black spots	0.65	faults which appear to pose almost no obstacle to the practicality, effective use, and operation.
	Polarizing plate	Scratches, foreign Matter, air bubbles, and peeling		
	Dots	Pinhole, deformation		
	Color tone	Color unevenness		
	Solder appearance	Cold solder Solder projections		

4-3 Inspection Provisions  
\*Viewing Area Definition

Fig. 1

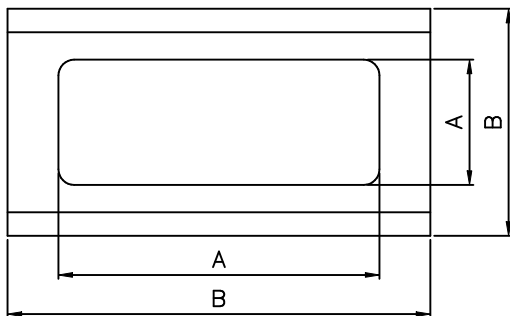

A : Zone Viewing Area  
B : Zone Glass Plate Out Line

\*Inspection place to be 500 to 1000 lux illuminance uniformly without glaring.  
The distance between luminous source(daylight fluorescent lamp and cool white fluorescent lamp) and a sample to be 30cm to 50cm.

\*Test and measurement are performed under the following conditions, unless otherwise specified.

Otherwise specified.

Temperature 20± 15°C  
Humidity 65± 20%R.H..  
Pressure 860~1060hPa(mmbar)

In case of doubtful judgment, it is performed under the following conditions.

Temperature 20± 15°C  
Humidity 65± 20%R.H..  
Pressure 860~1060hPa(mmbar)

5.Specification for quality check













5-1 Electrical characteristics

NO.	Item	Criterion
1.	Non operational	Fail
2.	Miss operating	Fail
3.	Missing dot	Fail
4.	Contrast irregular	Fail
5.	Response time	Within Specified value
6.	Backlight turn on /off	Within Specified value

5-2 External Appearance Defect




NO.	Item	Criterion																		
1.	Black spots, foreign matter, and white spots (Including light leakage due to pinholes of polarizing plates, etc.)	<p>(1)-1-Spots</p> <table border="1" data-bbox="695 488 1326 770"> <thead> <tr> <th>Average Diameter(mm):D</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td><math>D \leq 0.1</math></td> <td>Ignore</td> </tr> <tr> <td><math>0.1 &lt; D \leq 0.2</math></td> <td>5</td> </tr> <tr> <td><math>0.2 &lt; D \leq 0.3</math></td> <td>2</td> </tr> <tr> <td><math>0.3 &lt; D</math></td> <td>0</td> </tr> </tbody> </table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p> <p>(1)-2-Blurred Spots(At lighting condition)</p> <table border="1" data-bbox="695 1182 1326 1420"> <thead> <tr> <th>Average Diameter(mm):D</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td><math>D \leq 0.3</math></td> <td>Ignore</td> </tr> <tr> <td><math>0.3 &lt; D \leq 0.75</math></td> <td>5</td> </tr> <tr> <td><math>0.75 &lt; D</math></td> <td>0</td> </tr> </tbody> </table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p>	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.1$	Ignore	$0.1 < D \leq 0.2$	5	$0.2 < D \leq 0.3$	2	$0.3 < D$	0	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.3$	Ignore	$0.3 < D \leq 0.75$	5	$0.75 < D$	0
Average Diameter(mm):D	Number of pieces permitted																			
$D \leq 0.1$	Ignore																			
$0.1 < D \leq 0.2$	5																			
$0.2 < D \leq 0.3$	2																			
$0.3 < D$	0																			
Average Diameter(mm):D	Number of pieces permitted																			
$D \leq 0.3$	Ignore																			
$0.3 < D \leq 0.75$	5																			
$0.75 < D$	0																			

1.	Line	<p>(1)-1 Lines(At non lighting condition)</p> <table border="1" data-bbox="699 443 1423 721"> <thead> <tr> <th>Width(mm):W</th> <th>Length(mm):L</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td><math>W \leq 0.03</math></td> <td>Ignore</td> <td>Ignore</td> </tr> <tr> <td><math>0.03 &lt; W \leq 0.08</math></td> <td><math>L \leq 4</math></td> <td>2</td> </tr> <tr> <td><math>0.08 &lt; W \leq 0.1</math></td> <td><math>L \leq 1</math></td> <td>1</td> </tr> </tbody> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p> <p>(1)-2 Lins(At lighting condition)</p> <table border="1" data-bbox="699 1019 1423 1296"> <thead> <tr> <th>Width(mm):W</th> <th>Length(mm):L</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td><math>W \leq 0.03</math></td> <td>Ignore</td> <td>Ignore</td> </tr> <tr> <td><math>0.03 &lt; W \leq 0.08</math></td> <td><math>L \leq 3</math></td> <td>6</td> </tr> <tr> <td><math>0.08 &lt; W</math></td> <td><math>3 &lt; L</math></td> <td>None</td> </tr> </tbody> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p>	Width(mm):W	Length(mm):L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 4$	2	$0.08 < W \leq 0.1$	$L \leq 1$	1	Width(mm):W	Length(mm):L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 3$	6	$0.08 < W$	$3 < L$	None
Width(mm):W	Length(mm):L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 4$	2																								
$0.08 < W \leq 0.1$	$L \leq 1$	1																								
Width(mm):W	Length(mm):L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 3$	6																								
$0.08 < W$	$3 < L$	None																								
2.	Scratches(Glass, reflection plates, and polarizing plates)	In accordance with black spots. (At non lighting condition)																								
3.	Color irregular	Not remarkable color irregular.																								

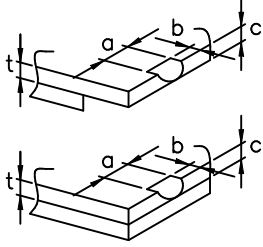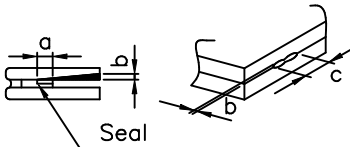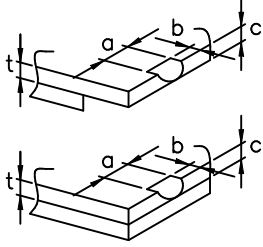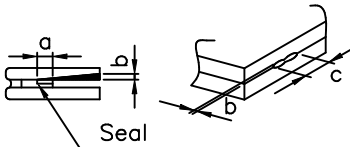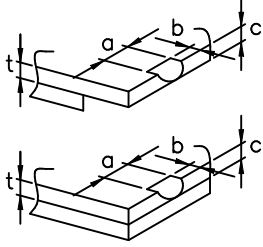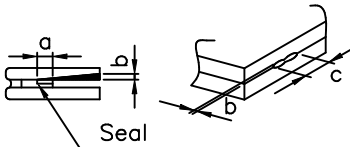4.	Air bubbles polarizing plates, and reflection plates	<table border="1"> <tr> <td data-bbox="695 394 949 533">Average Diameter (mm):D</td> <td data-bbox="954 394 1201 533">Number of pieces permitted</td> <td data-bbox="1206 394 1442 678" rowspan="2">Average diameter = (Long diameter + Short diameter)/2</td> </tr> <tr> <td data-bbox="695 539 949 678">D ≤ 0.3 0.3 &lt; D</td> <td data-bbox="954 539 1201 678">Ignore 0</td> </tr> </table>	Average Diameter (mm):D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2	D ≤ 0.3 0.3 < D	Ignore 0					
Average Diameter (mm):D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2										
D ≤ 0.3 0.3 < D	Ignore 0											
Note that when there are 4 pieces or more, they are not to be concentrated.												
5.	Cracks	<table border="1"> <tr> <td data-bbox="651 786 1042 1167"> <p>(1) General crack</p>  </td> <td data-bbox="1046 786 1442 1167"> <p><math>a \leq 5</math> <math>b \leq 2</math> <math>c \leq t</math></p> <p>Where, a and b are ignored when less than or equal 0.5. The numbers of pieces are set at up to 5 pieces.</p> </td> </tr> <tr> <td data-bbox="651 1173 1042 1352"> <p>(2) Corner crack</p>  </td> <td data-bbox="1046 1173 1442 1352"> <p><math>a \leq 2.5</math> <math>b \leq 2.5</math> <math>c \leq t</math> <math>a + b \leq 4</math></p> </td> </tr> <tr> <td data-bbox="651 1359 1042 1621"> <p>(3) Seal portion crack</p>  </td> <td data-bbox="1046 1359 1442 1621"> <p><math>a \leq \text{The seal width} \times 1/3</math> <math>b \leq t \times 2/3</math> <math>c \leq 5</math></p> <p>The numbers of pieces are set at up to 5 pieces.</p> </td> </tr> <tr> <td data-bbox="651 1628 1042 1854"> <p>(4) ITO Pin crack</p>  </td> <td data-bbox="1046 1628 1442 1854"> <p><math>a \leq 5</math> <math>b \leq 1/3 \text{ pin length}</math> <math>c \leq t</math></p> </td> </tr> <tr> <td data-bbox="651 1861 1042 1944"> <p>(5) Progressive cracks</p> </td> <td data-bbox="1046 1861 1442 1944"> <p>All taken to be unacceptable.</p> </td> </tr> </table>	<p>(1) General crack</p> 	<p><math>a \leq 5</math> <math>b \leq 2</math> <math>c \leq t</math></p> <p>Where, a and b are ignored when less than or equal 0.5. The numbers of pieces are set at up to 5 pieces.</p>	<p>(2) Corner crack</p> 	<p><math>a \leq 2.5</math> <math>b \leq 2.5</math> <math>c \leq t</math> <math>a + b \leq 4</math></p>	<p>(3) Seal portion crack</p> 	<p><math>a \leq \text{The seal width} \times 1/3</math> <math>b \leq t \times 2/3</math> <math>c \leq 5</math></p> <p>The numbers of pieces are set at up to 5 pieces.</p>	<p>(4) ITO Pin crack</p> 	<p><math>a \leq 5</math> <math>b \leq 1/3 \text{ pin length}</math> <math>c \leq t</math></p>	<p>(5) Progressive cracks</p>	<p>All taken to be unacceptable.</p>
<p>(1) General crack</p> 	<p><math>a \leq 5</math> <math>b \leq 2</math> <math>c \leq t</math></p> <p>Where, a and b are ignored when less than or equal 0.5. The numbers of pieces are set at up to 5 pieces.</p>											
<p>(2) Corner crack</p> 	<p><math>a \leq 2.5</math> <math>b \leq 2.5</math> <math>c \leq t</math> <math>a + b \leq 4</math></p>											
<p>(3) Seal portion crack</p> 	<p><math>a \leq \text{The seal width} \times 1/3</math> <math>b \leq t \times 2/3</math> <math>c \leq 5</math></p> <p>The numbers of pieces are set at up to 5 pieces.</p>											
<p>(4) ITO Pin crack</p> 	<p><math>a \leq 5</math> <math>b \leq 1/3 \text{ pin length}</math> <math>c \leq t</math></p>											
<p>(5) Progressive cracks</p>	<p>All taken to be unacceptable.</p>											

6	Outer dimensions	Should be within the tolerance.
7	Newton ring(touch panel)	Orbicular of interference fringes is not allowed in the optimum contrast within the active area under viewing angle.
8	Soldering	Should be no defective soldering such as shorting, loose terminal cold solder, peeling of printed circuit board pattern, improper mounting position, etc.

5-3 Dot Appearance Defect

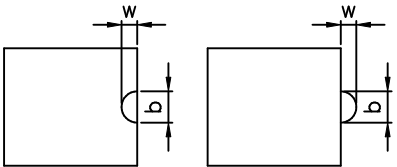NO.	Item	Criteria
1.	Plinhole	 <p>Dot display a and b are each <math>\leq 0.2\text{mm}</math> The overall total is taken be with in 10 units. Note that they are not to be concentrated.</p>
2.	Missing	 <p>Dot display a and b are each <math>\leq 0.2\text{mm}</math> The overall total is taken to be with in 10 units.</p>
3.	Thick and thin display	 <p>Taken to be within <math>\pm 1.5\%</math> of display character width(a) and height(b).</p>

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LM701-6B DATE : DEC. 22, 2005 SHEET NO. : 22/23
---	---------------	---

- SAFETY

- 1.If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin.
- 2.If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.

- HANDLING

- 1.Avoid static electricity which can damage the CMOS LSI.
- 2.Do not remove the panel or frame from the module.
- 3.The polarizing plate of the display is very fragile. So, please handle it very carefully.
- 4.Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- 5.Do not use ketonics solvent & Aromatic solvent, use with a soft cloth soaked with a cleaning naphtha solvent.

- STORAGE

- 1.Store the panel or module in a dark place where the temperature is  $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$  and the humidity is below 65% RH.
- 2.Do not place the module near organics solvents or corrosive gases.
- 3.Do not crush, shake, or jolt the module.

- TERMS OF WARRANT

- 1.Acceptance inspection period  
The period is within one month after the arrival of contracted commodity at the buyer's factory site.
- 2.Applicable warrant period  
The period is within twelve months since the date of shipping out under normal using and storage conditions.

REV/DATE	R0/ 12.22.04'					BY T.M. Chen
----------	------------------	--	--	--	--	-----------------





# THE NOTES OF LCM USING

LCM is easy to damage.


Please follow the notes as bellows, and be careful of handling!

## Correct handling

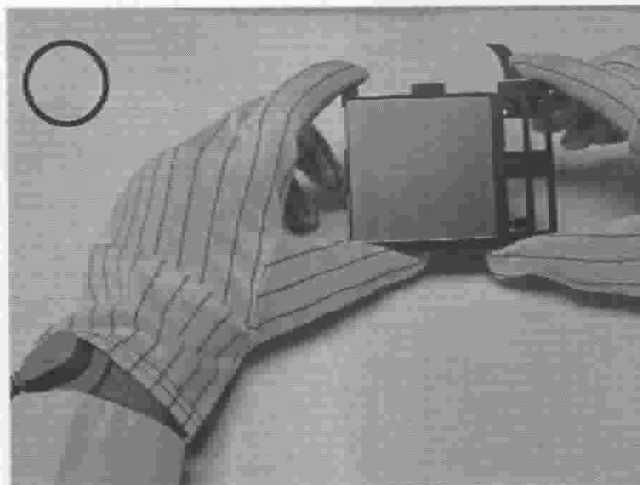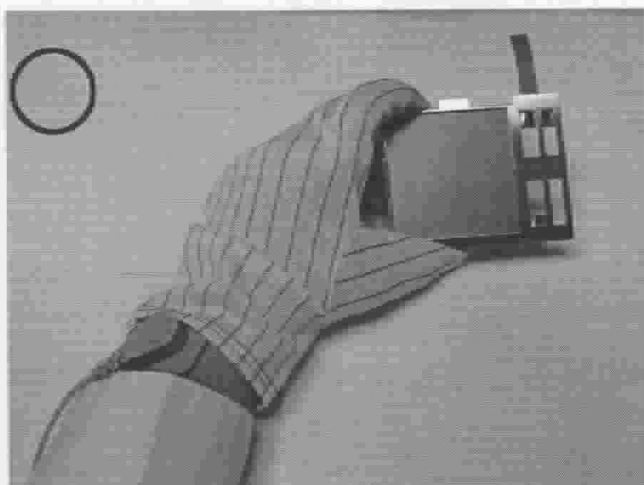


As above picture, please handle with glove by LCM edges and full EOS/ESD protection.


## Incorrect handling

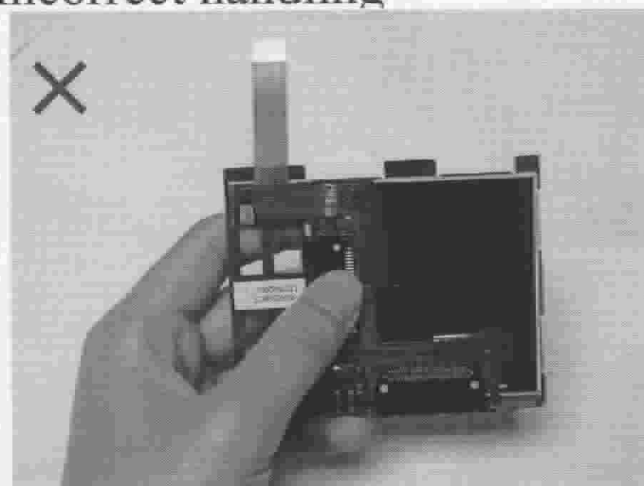


Please don't touch IC directly.

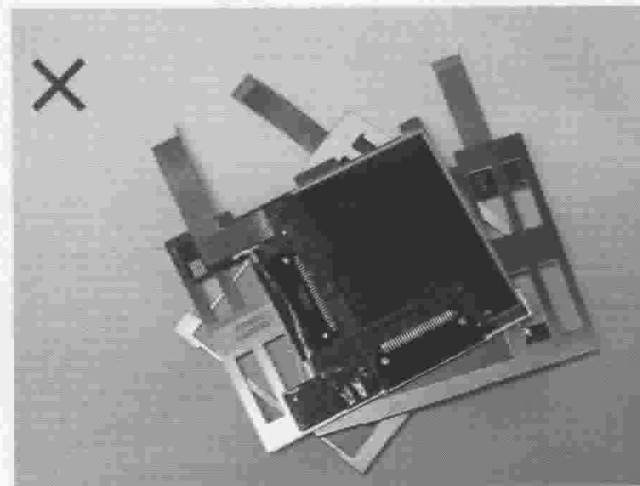

Please don't put one on another LCM.

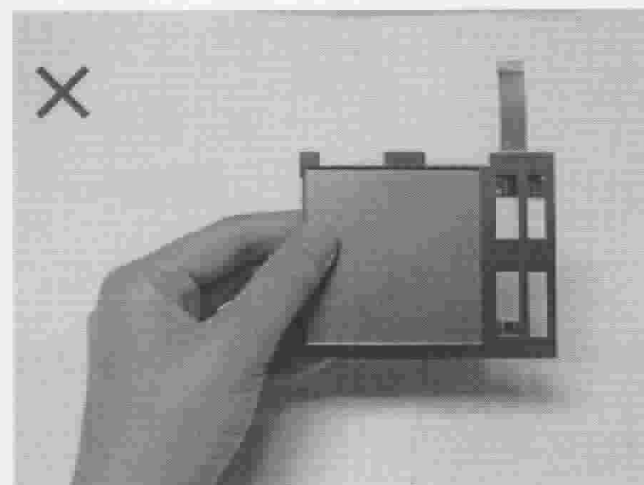

Please don't hold the surface of LCM.

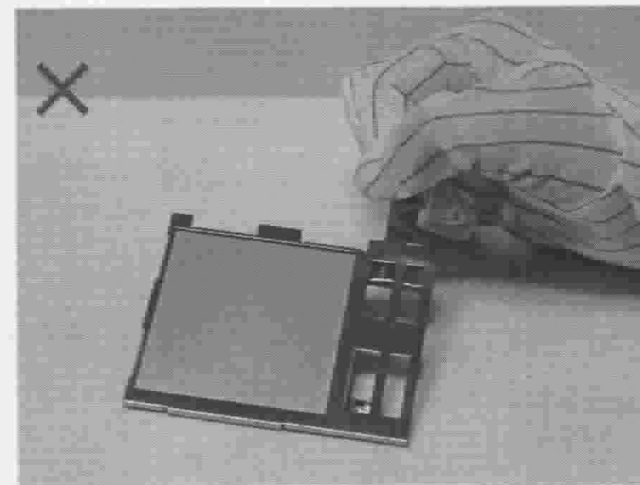



Please don't stretch interface of output.

# THE NOTES OF LCD USING

LCD is easy damage.


Please follow notes as bellows, and be careful of handling!

## Correct handling

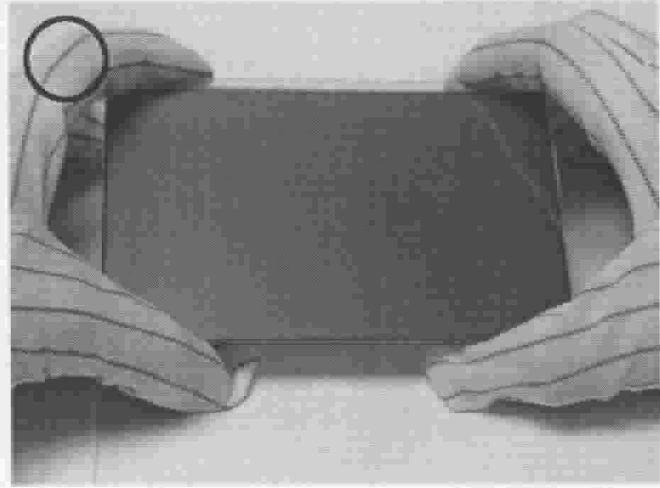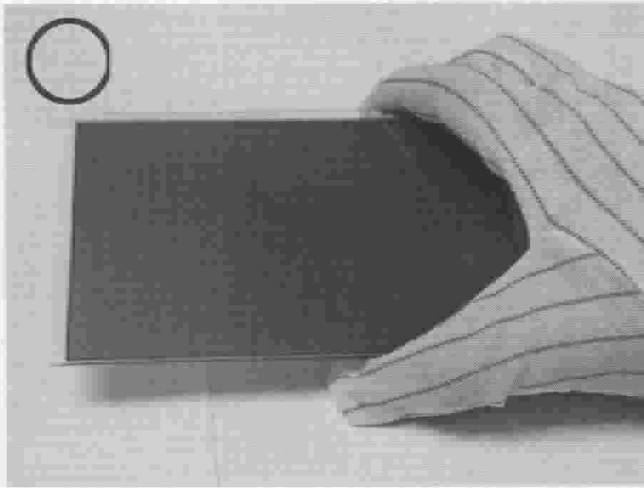


As above picture, please handle with glove by LCD edges and full EOS/ESD protection.


## Incorrect handling

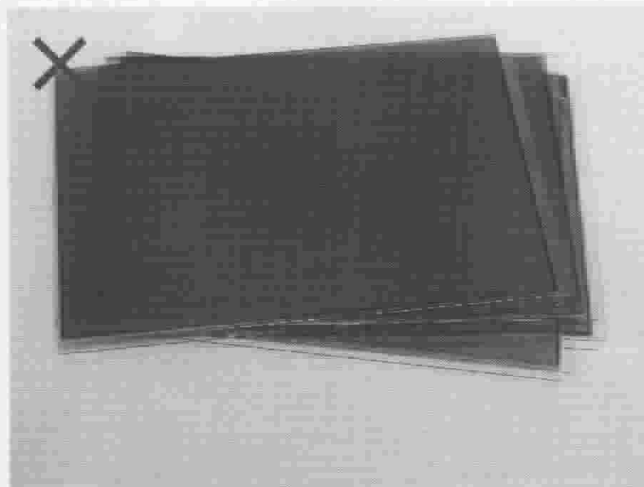


Please don't put one on another LCD.

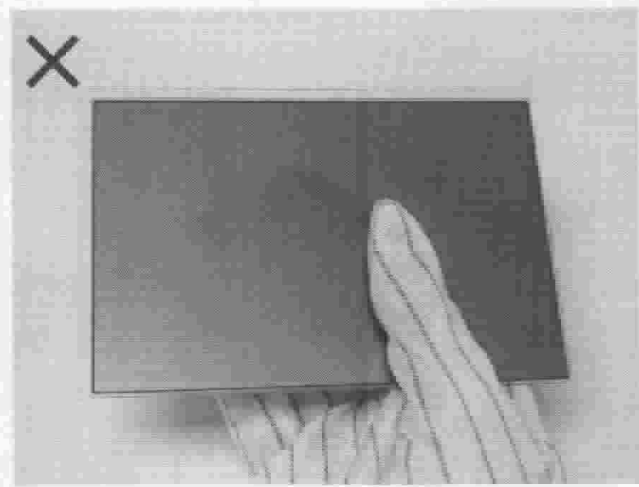

Please don't hold the surface of LCD.

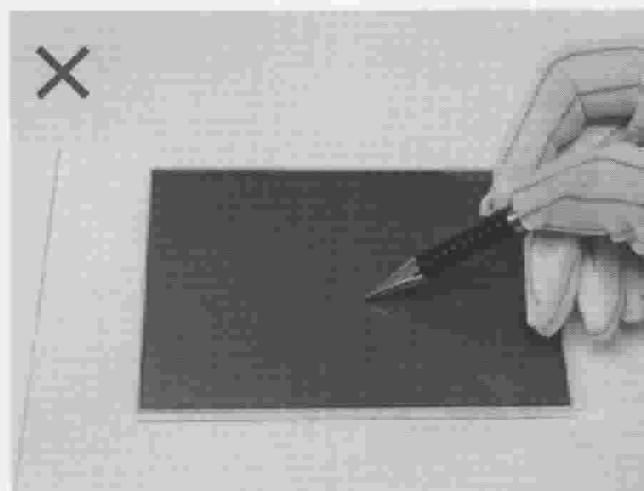

Please don't operate with sharp stick such as sharp pencil.

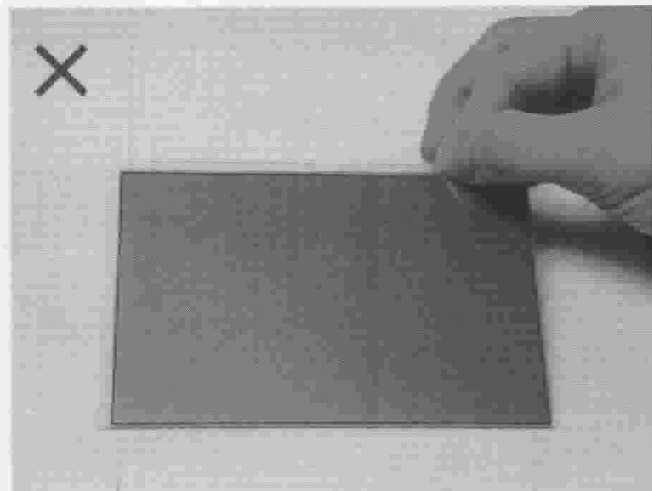

Please don't touch ITO glass without anti-static gloves.

